




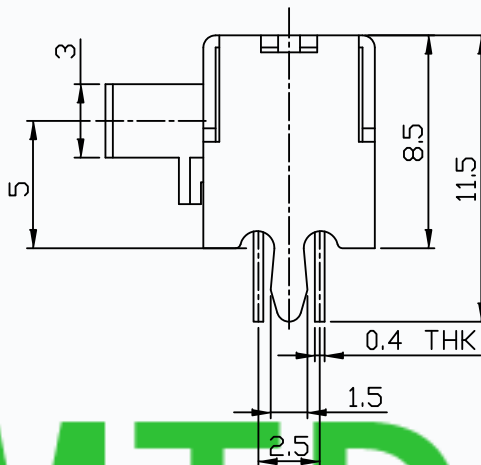



CAD FILE:

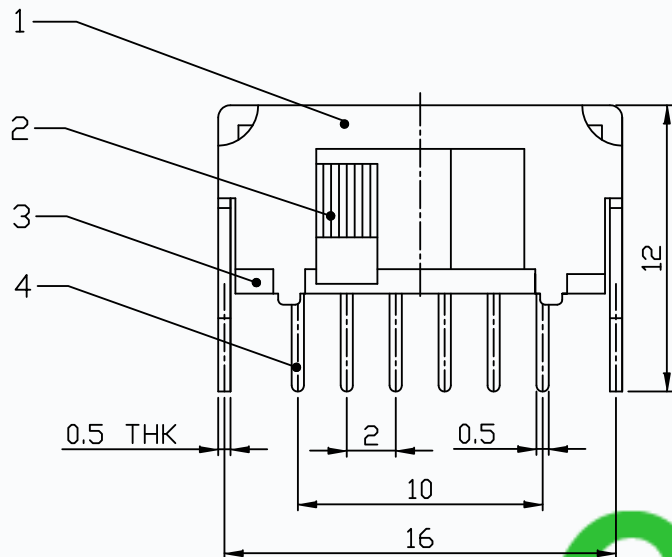

MODEL NO.	KNOB(G/VG)
T3-242003-G	(2~10)mm

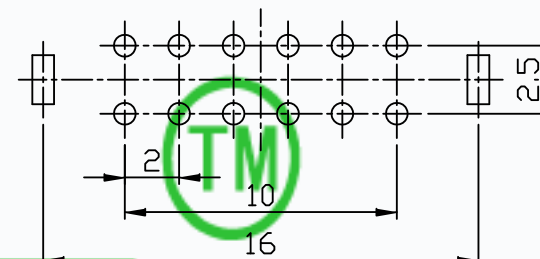

P.C.B. LAYOUT

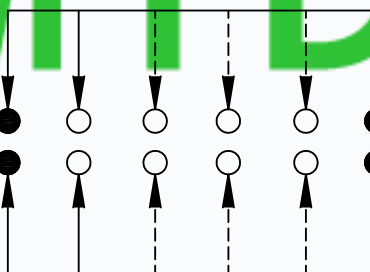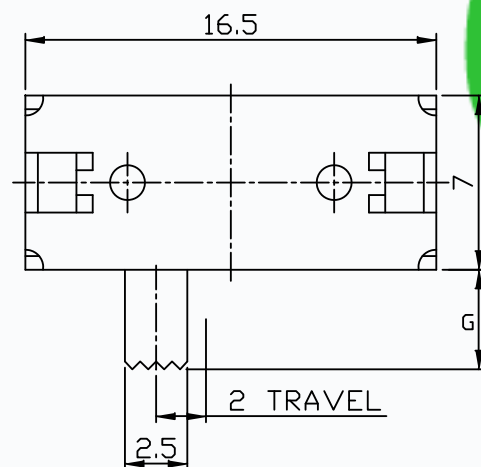

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.3A 50V DC
CIRCUIT	2P4T
Timing	NON-SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD		
7					UNLESS SPECIFIED			
6	SPRING PLATE	SUS STRIP	1	NATURAL	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	BRASS STRIP	12	Ag PLATED		TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T3-242003-00
3	BASE	PHENOLIC RESIN	1	NATURAL		MODEL: T3-242003-G	SCALE: 3:1	DWN. ERIC 2013-6-17
2	KNOB	POM	1	BLACK				CHK'D MAIKO 2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED				APPD. Coco 2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH		CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.		