

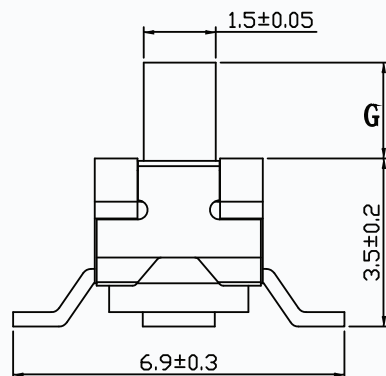


CAD FILE:


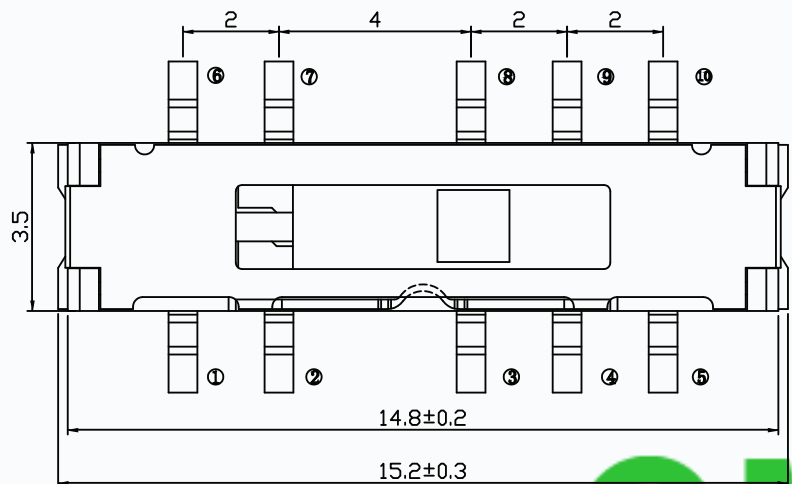


MODEL NO.	KNOB(G)
T1-2436S-G	(2~8)mm

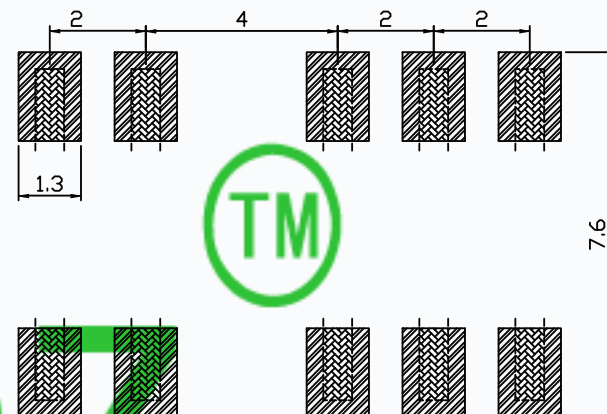

CMTDDZ

P.C.B. LAYOUT

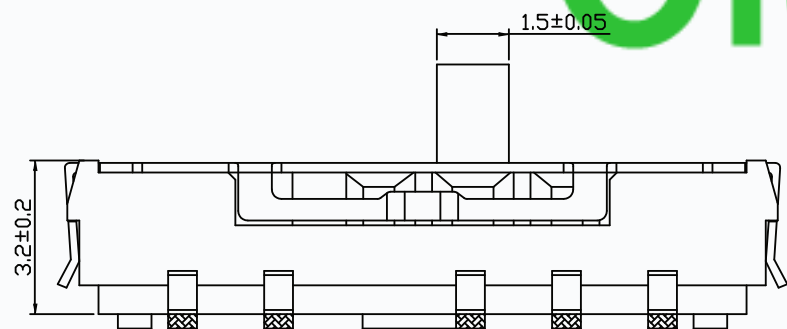

SCHEMATIC (SHORTING)

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	> 100 M Ω
Dielectric Withstanding Voltage	500V 0.5mA/min
Contact Resistance	< 70 m Ω
Operating Force	200gf $\pm$ 100gf
Operating Life	10,000 cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2014-8-31	TIANDU ELECTRONICS	
5	CLIP	BECU	2	Ag PLATED	OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	PHOSPHOR BRONZE	10	Ag PLATED	TITLE : MINI SLIDE SWITCH		UNIT : mm	DRWG NO.:CMTDDZ-T1-2436S-00	
3	CASE	PA46	1	BLACK	MODEL: T1-2436S-G		SCALE:3:1	DWN.	ERIC
2	COVER	SUS	1	Nature	CMTDDZ 东莞市田都电子有限公司		DONGGUAN TIANDU ELECTRONICS CO.,LTD.	CHK'D	MAIKO
1	SLIDER	PA46	1	BLACK				APPD	Coco
NO.	PARTS	MATERIALS	Q'TY	FINISH					