




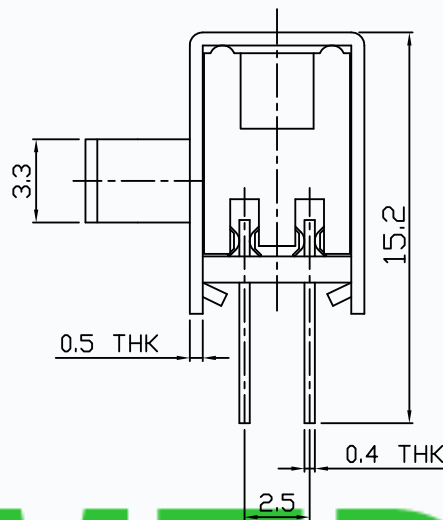



CAD FILE:

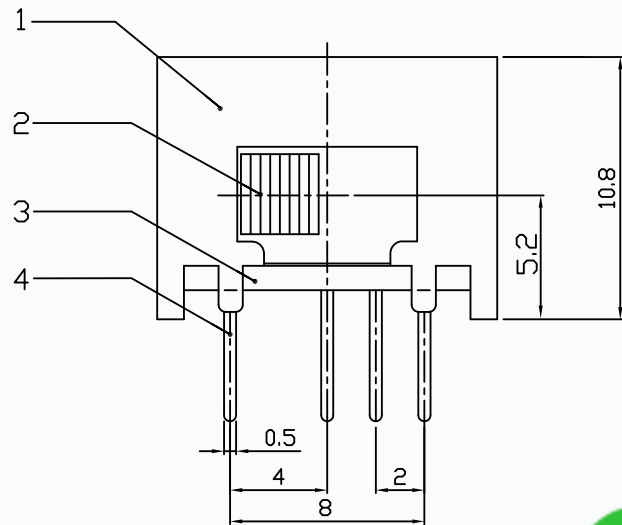

MODEL NO.	KNOB(G/VG)
T3-232003-G	(2~15)mm

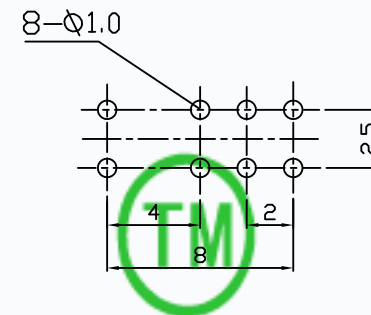

P.C.B. LAYOUT

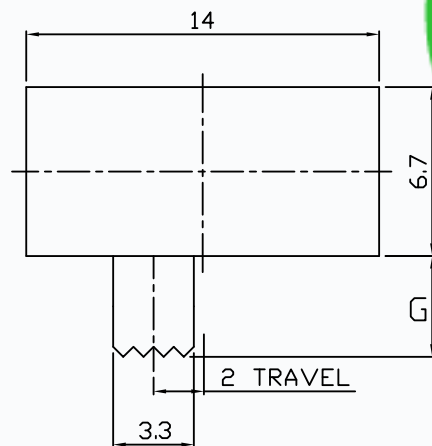

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.3A 50V DC
CIRCUIT	2P3T
Timing	NON-SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD			
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED				
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		DESCRIPTIONS OF REVISION		APPD.	
4	TERMINAL	BRASS STRIP	8	Ag PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL	TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T3-232003-00		
2	KNOB	POM	1	BLACK	MODEL: T3-232003-G	SCALE: 3:1	DWN.	ERIC	2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.		CHK'D	MAIKO	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH			APPD.	Coco	2013-6-17