
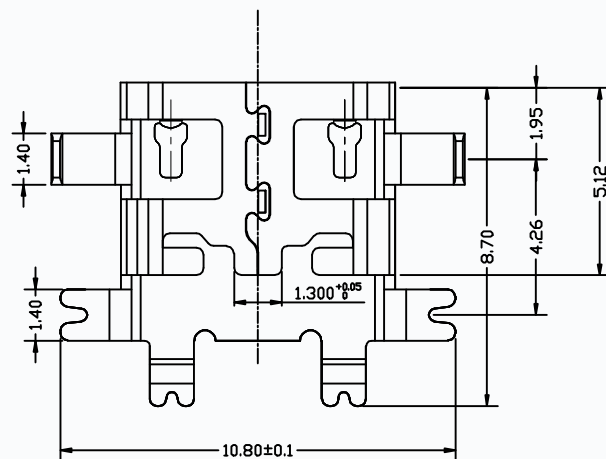
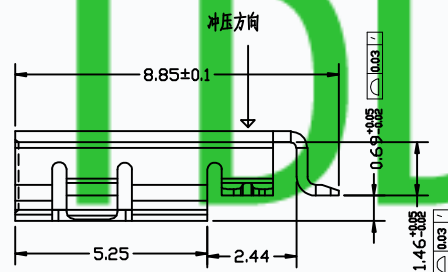
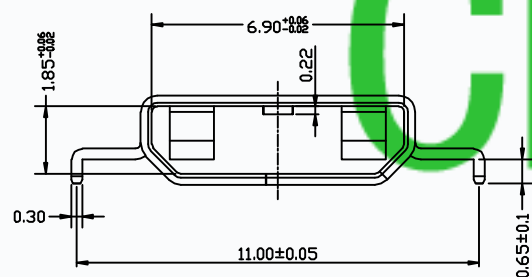


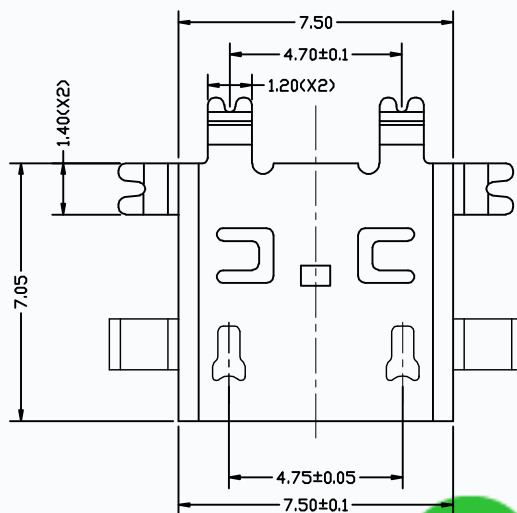

NOTES:

- MATERIAL:
HOUSING: THERMOPLASTIC HIGH-TEMP UL94V-0 BLACK COLOR.
CONTACT: COPPER ALLOY.
SHELL: C2680-H.
- FINISH:
CONTACT: 50u"~80u" Ni/G.F PLATED OVER ALL.
SHELL: 50u"~80u" Ni/80u" MIN. MATTE Tin PLATED OVER ALL.
- APPLIED TO IR SOLDERING PROCESS.
- SPECIFICATION:
4.1. ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING: 1A MIN.
VOLTAGE RATING: 30V AC rms.
CONTACT RESISTANCE: 30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:
UNMATEP CONTACT 100V AC rms. 60MHZ FOR 1 MINUTE.
INSULATION RESISTANCE: 1000MΩ MIN. 100V DC
TEMPERATURE RANGE: -20°C TO +85°C
4.2. MECHANICAL:
INSERTION FORCE: 35N MAX.
WITHDRAWAL FORCE: 8N MIN.
DURABILITY: 10,000 CYCLES

备注:

- 材质: C2680-H; 厚度 $T=0.30\pm0.01\text{mm}$
- 未注R角: 0.15mm
- 毛头: 0.05mm MAX
- Major Dim
- 表面镀Ni 50u"; 镀Sn 100u"
- 大只脚的平面度 0.03MM(MAX)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD.

DIM	TOL	DIM	TOL
X.	±0.35	X°	±1°
X.X	±0.25	X.X°	±0.5°
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

UNITS mm	NAME<INTENDED USE> USB		东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD			
MAT'L 材质	MODEL NO. T10-05CB03		TITLE: MICRO USB 5P/F B-TYPE 大脚板背面脚插后全路直连			
FINISH 硬度	APPD:		DWG NO.: CMTD-MC-06-070-01			
	CHKD:		制 F001			
Q'TY 数量	DR: MC 11/9'12			SCALE 1/1	SHEET 页号	REV. 版本