
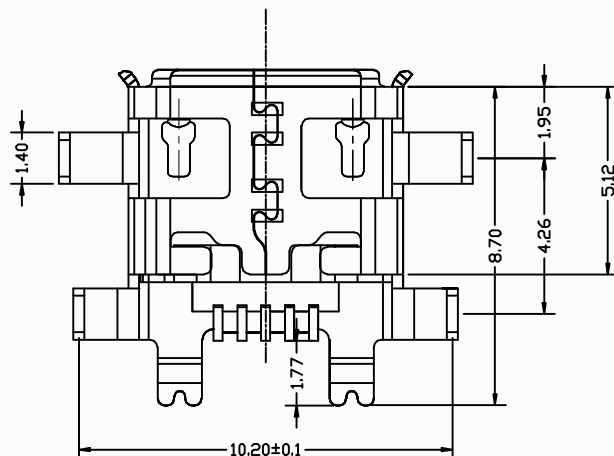
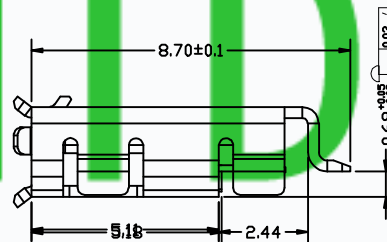
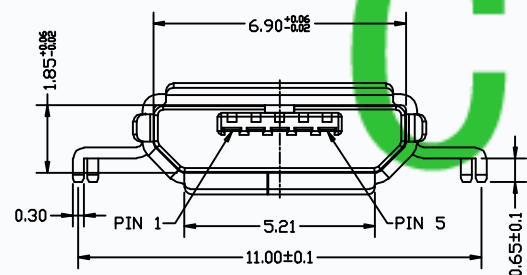
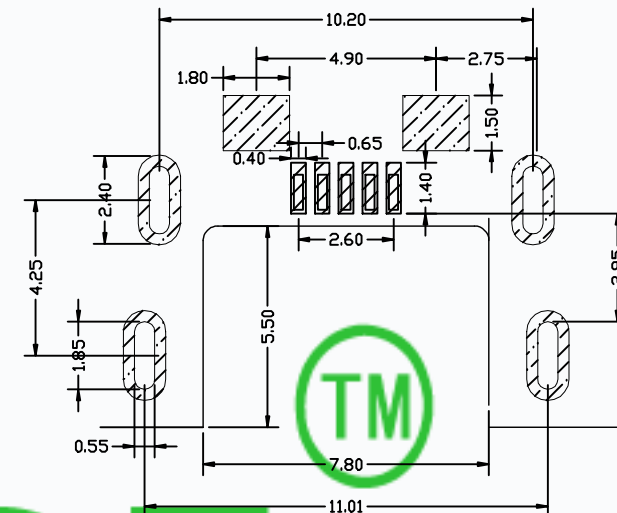


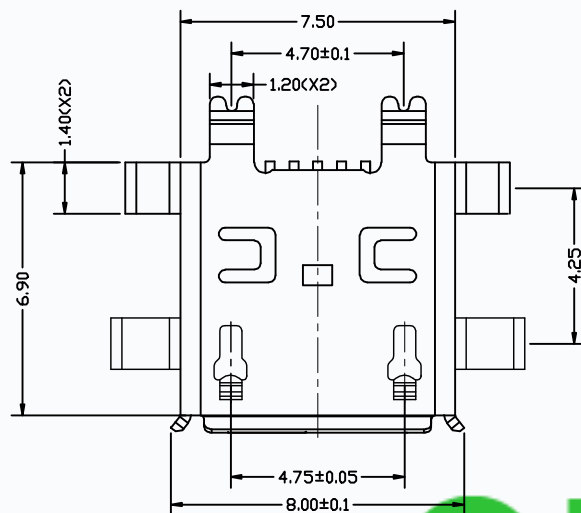

2. FINISH:
CONTACT: 50u"~80u" Ni/G.F PLATED OVER ALL.
SHELL: 50u"~80u" Ni/80u" MIN. MATTE Tin PLATED OVER ALL.
3. APPLIED TO IR SOLDERING PROCESS.
4. SPECIFICATION:
- 4.1. ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING: 1A MIN.
VOLTAGE RATING: 30V AC rms.
CONTACT RESISTANCE: 30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:
UNMATEP CONTACT 100V AC rms. 60MHZ FOR 1 MINUTE.
INSULATION RESISTANCE: 1000MΩ MIN. 100V DC
TEMPERATURE RANGE: -20°C TO +85°C
- 4.2. MECHANICAL:
INSERTION FORCE: 35N MAX.
WITHDRAWAL FORCE: 8N MIN.
DURABILITY: 10,000 CYCLES

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF DONGGUAN
TIANDU ELECTRONICS CO.,LTD. AND
SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
DONGGUAN TIANDU ELECTRONICS CO., LTD

DIM	TOL	DIM	TOL
X.	±0.35	X°	±1°
X.X	±0.25	X.X°	±0.5°
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

UNITS mm	NAME<INTENDED USE> USB	东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD		
MAT'L 材质	MODEL NO. T10-05CB04	TITLE: MICRO USB 5P/F B-TYPE 大脚孔0.7 管4 脚插后两脚		
FINISH 硬度	APPD:	DWG NO.: CMTD-MC-06-070-02		
Q'TY 数量	CHKD:	制 FWD.	SCALE 1/1	SHEET 1/1
	DR: MC 13/5'14		REV. A	