
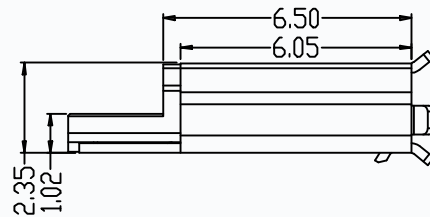
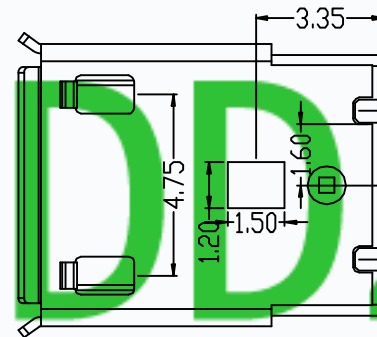
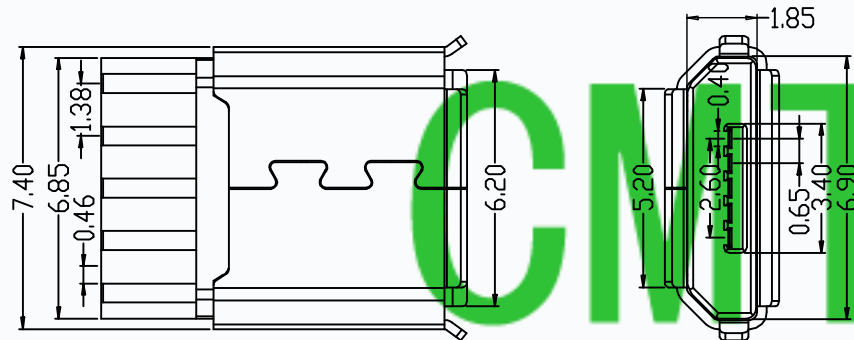


RoHS DIRECTIVE

REV.	ECN. NO.	DESCRIPTION	DATE	DESIGN
------	----------	-------------	------	--------

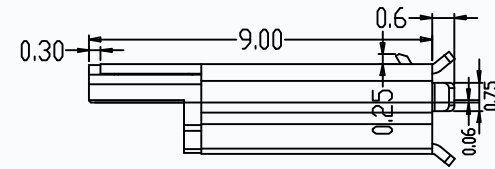

Note:

1.Material:

- 1.1 Housing: LCP,UL94v-0
- 1.2 Contact: Cu5191,t=0.25mm
- 1.3 Shell: Cu2680,t=0.25mm
- 1.4 Wrap: ABS+PC

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 0.81~2.05 Kgf Min.after 10000 insertion/extration cycles
- 2.7 Temperature range: -30℃~80℃

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD.

DIM	TOL	DIM	TOL
X	±0.35	X°	±1°
X.X	±0.25	X.X°	±0.5°
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

UNITS
mm
MAT'L
材质
FINISH
硬度
Q'TY
数量

NAME (INTENDED USE)

USB

MODEL NO.

T10-05HX01

APPD:

CHKD:

DR:

MC

11/9'10

东莞市田都电子有限公司
DONGGUAN TIANDU ELECTRONIC CO.,LTD

TITLE:
MICRO USB 5P/F B-TYPE 焊线式母座主体

DWG NO.:
CMTD03-00903-03-270-5P

角法 PROJ.	SCALE 1/1	SHEET 页号	REV. 版本
-------------	--------------	-------------	------------