

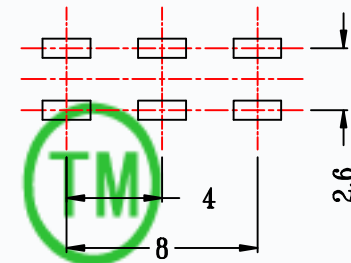
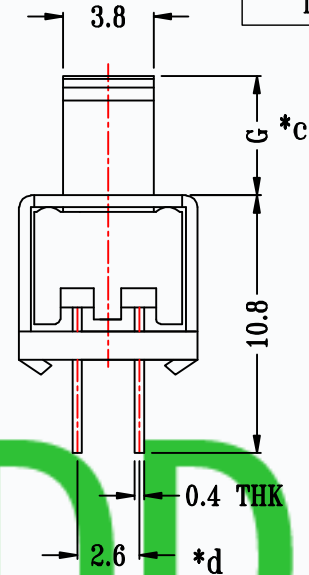
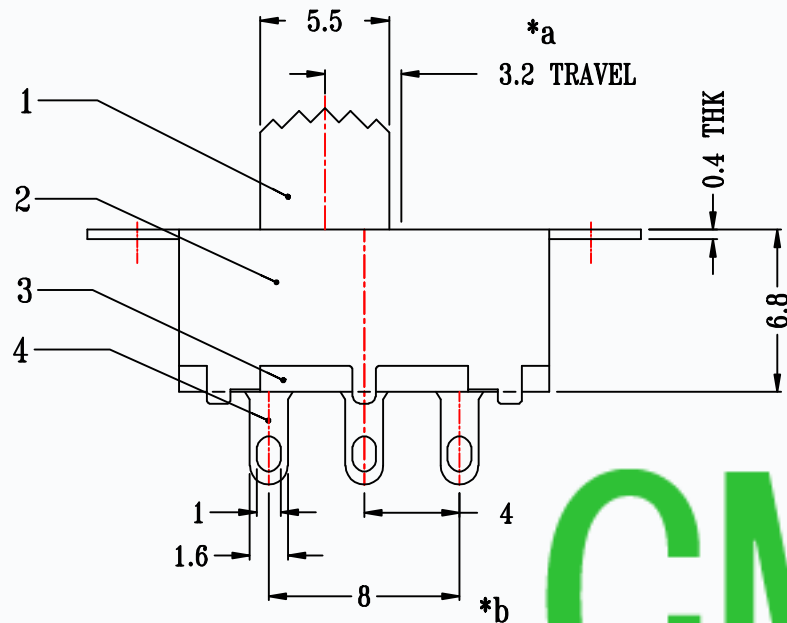


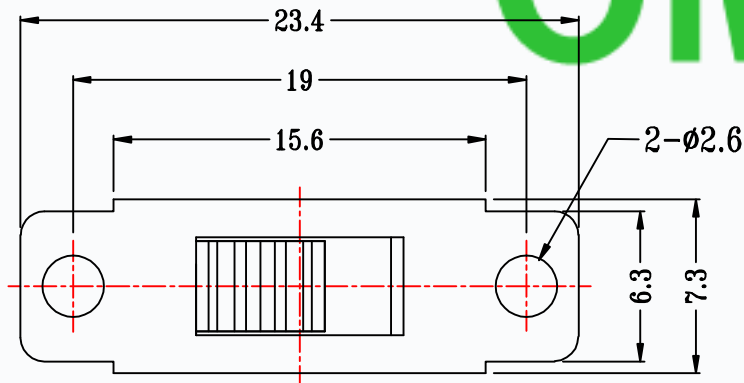

CAD FILE:

P.C.B LAYOUT
BOTTOM VIEW

SCHEMATIC (NON-SHORTING)



SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	2P2T
Timing	NON-SHORTING
Travel	3.2mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD		
7					UNLESS SPECIFIED			
6	SPRING	STEEL STRIP	2	NATURAL	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm			
5	CONTACT CLIP	BRASS STRIP	2	Ag PLATED		DESCRIPTIONS OF REVISION		
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED		APPD.		
3	BASE	PHENOLIC RESIN	1	NATURAL	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	
2	FRAME	STEEL STRIP	1	BLACK	MODEL: T2-223032-G		SCALE: 3:1	
1	KNOB	POM	1	BLACK	DWN.		ERIC	
NO.	PARTS	MATERIALS	Q'TY	FINISH	CMTDDZ 东莞市田都电子有限公司		CHK'D	
					DONGGUAN TIANDU ELECTRONICS CO.,LTD.		MAIKO	
							APPD.	
							2013-6-17	
							2013-6-17	
							2013-6-17	