


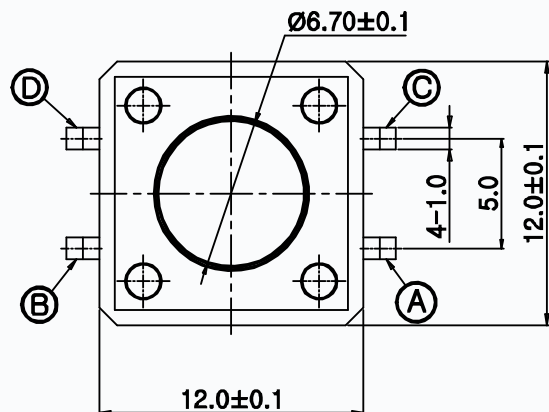
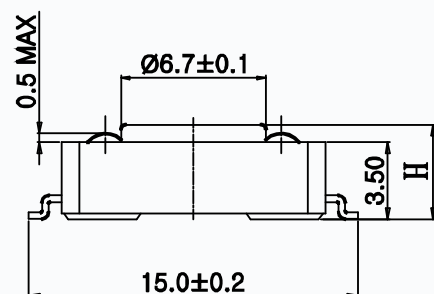


CAD FILE:

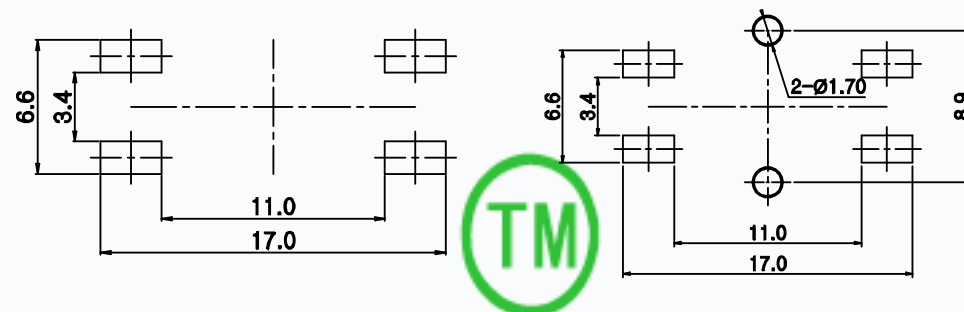


CIRCUIT DIAGRAM



MODEL NO.	XX	H(mm)	Guide bosses
T6-1212S-XX-H	18=180gf	4.3~20	NO
T6-1212SG-XX-H	25=250gf		HAVE



T6-1212S-XX-H

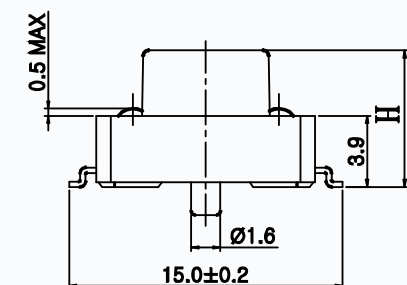

T6-1212SG-XX-H



CMTDDZ

T6-1212S-XX-H

T6-1212SG-XX-H

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	180±50gf/250±50gf
Operating Life	100,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	COVER	SPCC	1	PLATING NICKEL			DESCRIPTIONS OF REVISION				APPD.	
4	KEYSTOKE	NYLON	1	BLACK/WHITE	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-1212S-00		
3	TERMINAL	BRASS	4	PLATING SILVER	MODEL: T6-1212S/SG-XX-H			SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	SUS	1	Ag CLAD	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.					CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK						APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH								