


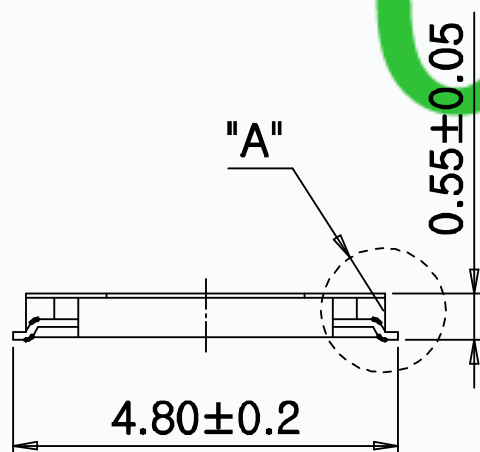
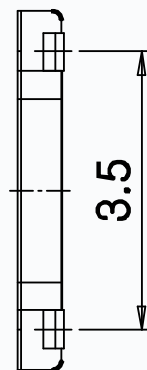
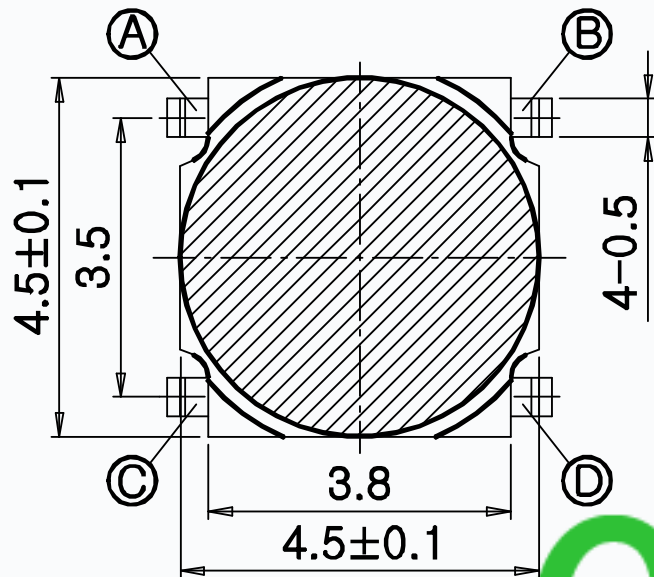


CAD FILE:

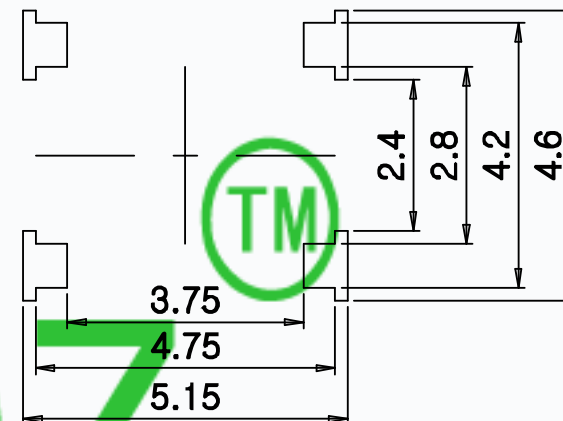

CIRCUIT DIAGRAM

MODEL NO.	XX
T6-4545BS-XX	10=100GF
	16=160GF
	20=200GF
	26=260GF



P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.2±0.05mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	100±50gf/160±50gf/20±50gf/260±50gf
Operating Life	500,000 Cycles for 200/260gf, 1,000,000 Cycles for 100/160gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5							DESCRIPTIONS OF REVISION			APPD.		
4	DUST COVER	KAPTON FILM	1	YELLOW	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-4545BS-00		
3	TERMINAL	PHOSPHOR BRONZE	4	PLATING SILVER	MODEL: T6-4545BS-XX			SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D		MAIKO	2013-6-17	
1	BASE	NYLON	1	BLACK				APPD.		Coco	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH								