





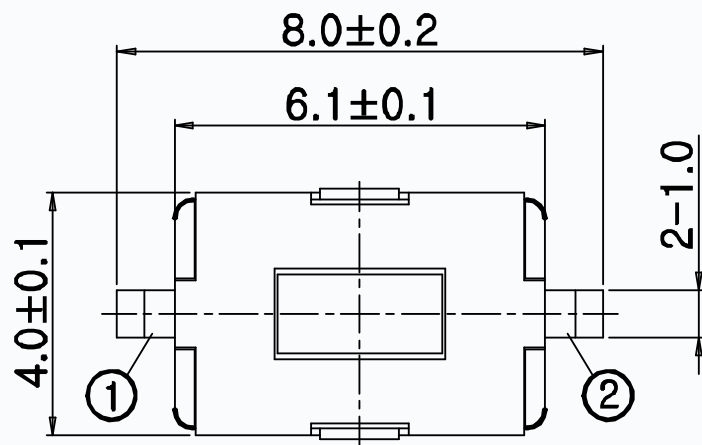


CAD FILE:



MODEL NO.	XX
T6-4060S-XX	18=180GF
	25=250GF

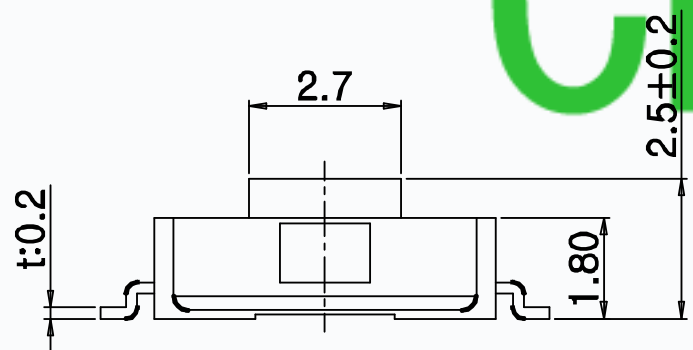

CIRCUIT DIAGRAM

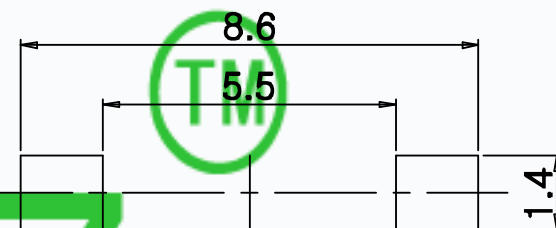

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	180±50GF/250±50GF
Operating Life	30,000 Cycles for 250gf 50,000 Cycles for 180gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7											
6											
5	COVER	SUS	1	NATURAL			DESCRIPTIONS OF REVISION		APPD.		
4	KEYSTOKE	NYLON	1	RED	TITLE : TACT SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-4060S-00		
3	TERMINAL	BRASS	2	PLATING SILVER	MODEL: T6-4060S-XX		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							