


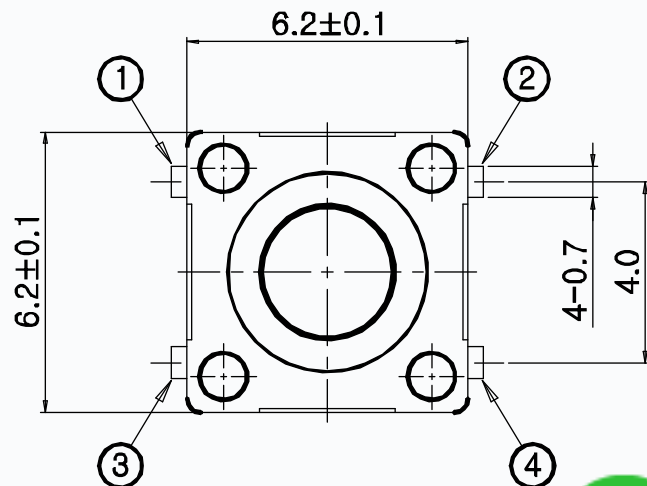


CAD FILE:


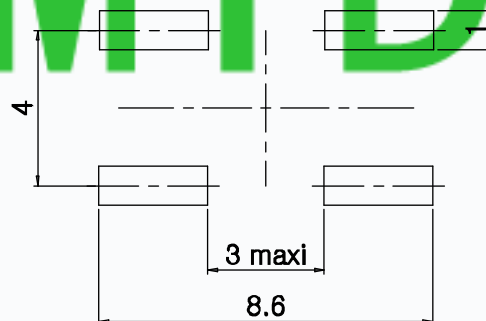


Terminal spacing of 4.0/4.5mm

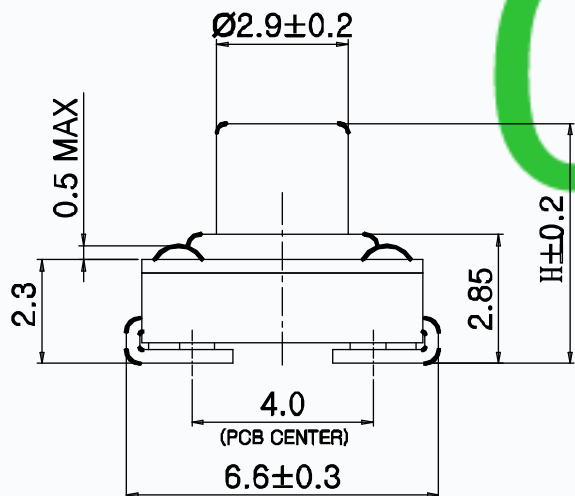

P.C.B. LAND PATTERN

MODEL NO.	XX	H(mm)
T6-6262S-XX-T-H	20=200GF	3.3
	30=300GF	3.7
		4.5
		5.2
	T(mm)	9.7
	4.0	
	4.5	



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.3±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	200±50/300±70gf
Operating Life	300,000 Cycles
Ip Rating	IP66

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7											
6	KNOB	NYLON	1	RED							
5	COVER	BRASS	1	TIN PLATED			DESCRIPTIONS OF REVISION				APPD.
4	WATERPROOF SILICONE	SILICA GEL	1	BLACK	TITLE : WATERPROOF SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-6262S-00		
3	TERMINAL	COPPER	4	PLATING SILVER	MODEL: T6-6262S-XX-T-H		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							

DESCRIPTIONS OF REVISION

APPD.