




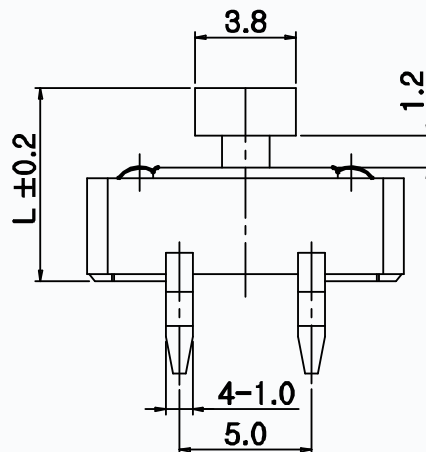



CAD FILE:

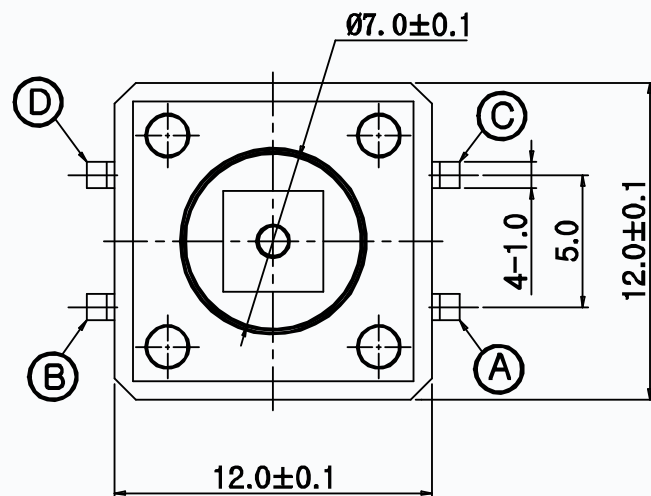

MODEL NO.	XX
T6-1212AD-XX	12=120gf
	18=180gf
	25=250gf

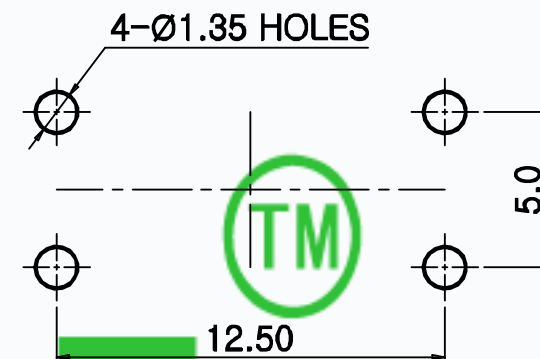

P.C.B. LAND PATTERN

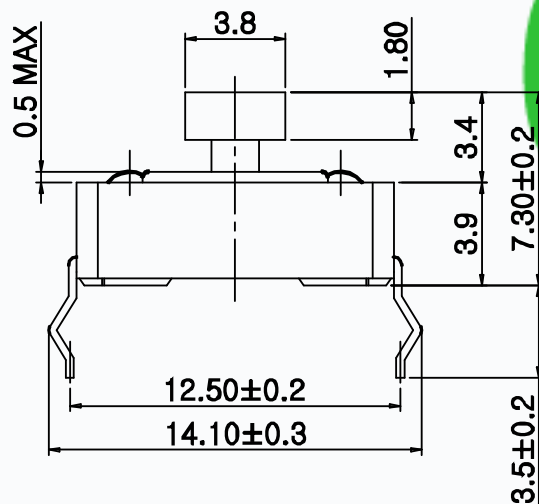

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.3±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	100±30gf/180±50gf/250±50gf
Operating Life	100,000 Cycles

8				TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7										
6										
5	COVER	SPCC	1			PLATING NICKEL	DESCRIPTIONS OF REVISION			APPD.
4	KEYSTOKE	NYLON	1	BLACK/WHITE	TITLE : TACT SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T6-1212AD-00		
3	TERMINAL	BRASS	4	SILVERING	MODEL: T6-1212AD-XX		SCALE: 3:1	DWN.	ERIC	2013-6-17
2	CONTACT	SUS	1	Ag CLAD	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK				APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH						