

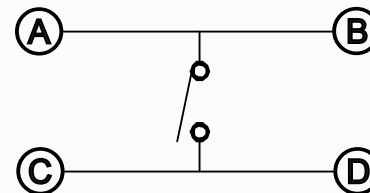




CAD FILE:

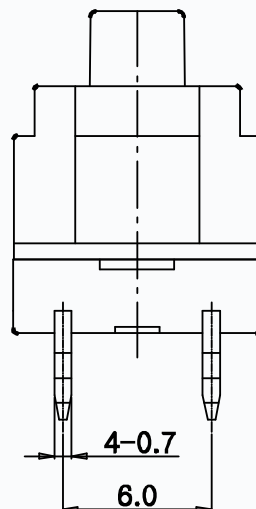

CIRCUIT DIAGRAM

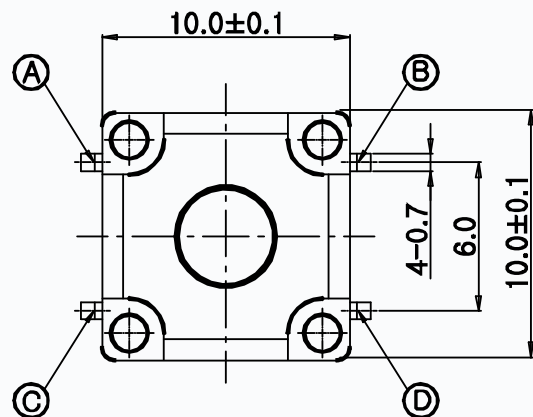

MODEL NO.	T6-1010D-XX-H	
XX	H(mm)	H(mm)
18=180GF	13	19
25=250GF	14	20
	15	21
	16	22
	17	23
	18	

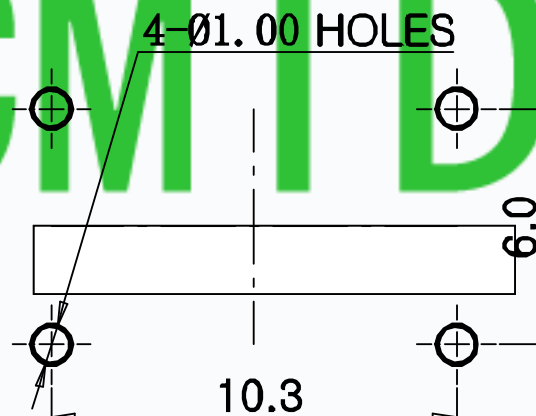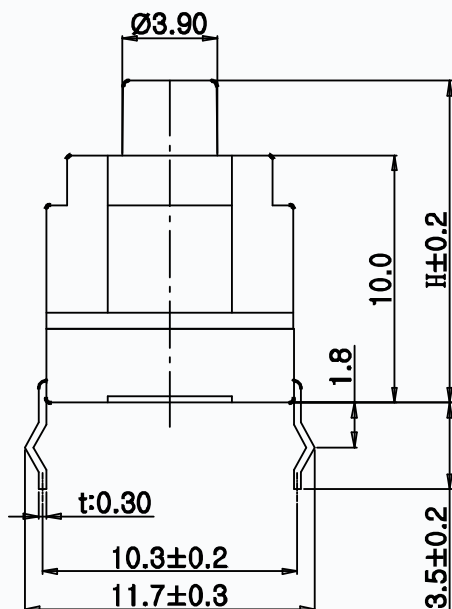

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.3±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	180±50gf/250±50gf
Operating Life	100,000 Cycles
Ip Rating	IP67

8	GUST FILM	PLOYIMIDE TAPE	1	-----	TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7	GASKET	PPA	1	BLACK							
6	KNOB	PPA	1	BLACK							
5	COVER	PPA	1	BLACK							
4	WATERPROOF SILICONE	SILICA GEL	1	BLACK							
3	TERMINAL	BRASS	4	SILVERING	TITLE : WATERPROOF SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-1010D-00		
2	CONTACT	SUS	1	SILIVER COVERED	MODEL: T6-1010D-XX-H		SCALE: 3:1		DWN.	ERIC	2013-6-17
1	BASE	PPA	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	Coco	2013-6-17

DESCRIPTIONS OF REVISION

APPD.