

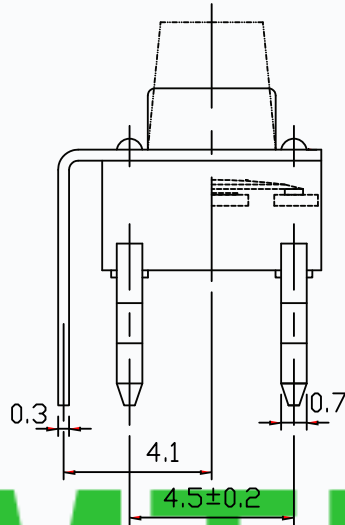
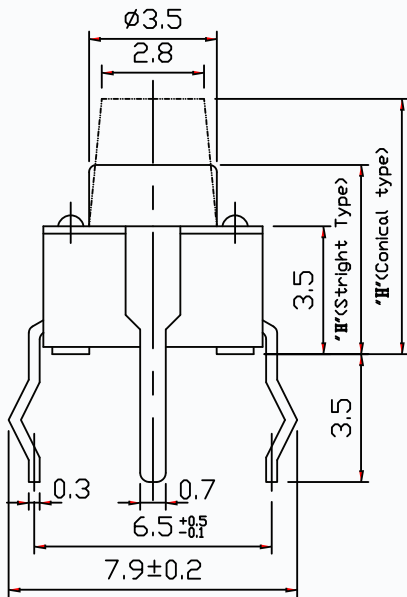
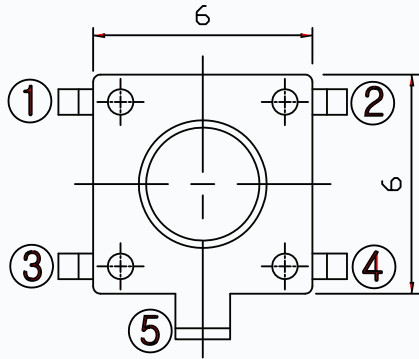


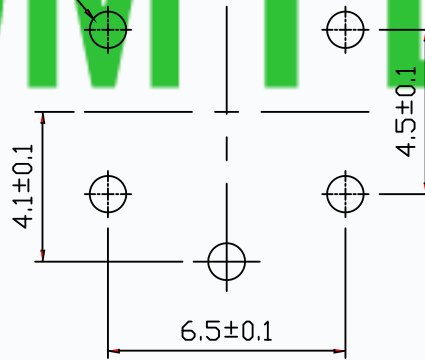


CAD FILE:

5- $\varnothing 1.0$ 

P.C.B. LAND PATTERN



CIRCUIT DIAGRAM



MODEL NO.	T6-6060LD-XX-H	
XX	H(mm)	H(mm)
10=100GF	4.3	11
16=160GF	4.5	11.5
26=260GF	5.0	12
32=320GF	5.5	12.5
52=520GF	6.0	13
	6.5	13.5
	7.0	14
	7.5	15
	8.0	15.5
	8.5	16
	9.0	16.5
	9.5	17
	10.0	18
	10.5	19

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25 $\pm$ 0.1mm
Contact Resistance	$\leq$ 100 m Ω
Operating temperature	-20 $^{\circ}$ C ~ 70 $^{\circ}$ C(45% ~ 85% RH)
Operating Force	100 $\pm$ 50/160 $\pm$ 50/260 $\pm$ 50/320 $\pm$ 80/520 $\pm$ 130gf
Operating Life	50,000 Cycles for 320/520gf, 100,000 Cycles for 260gf , 200,000 Cycles for 100/160gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7											
6											
5	KNOB	NYLON	1	BLACK			DESCRIPTIONS OF REVISION		APPD.		
4	COVER	NYLON	1	BLACK	TITLE : TACT SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T6-6060LD-00			
3	TERMINAL	BRASS(0.3T)	4	PLATING SILVER							
2	CONTACT	F.Ag/C5210	1	NATURAL	MODEL: T6-6060LD-XX-H		SCALE: 3:1		DWN.	ERIC	2013-6-17
1	BASE	NYLON	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	Coco	2013-6-17