




CAD FILE:



MODEL NO.	XX	H
T6-6262GS-XX	16=160GF	2.5MM
	25=250GF	3.1MM

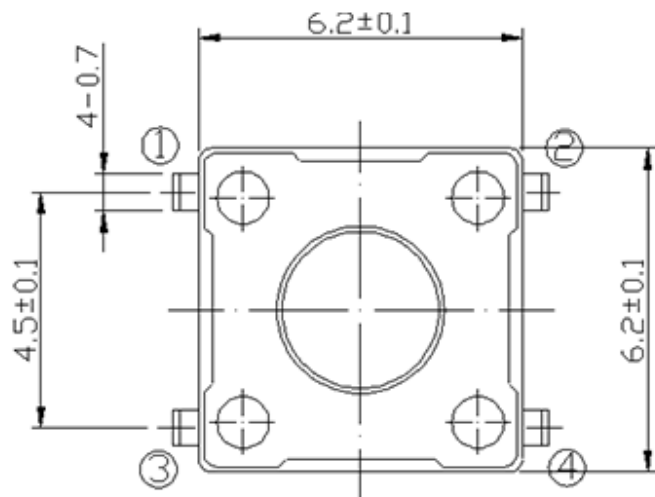

CIRCUIT DIAGRAM

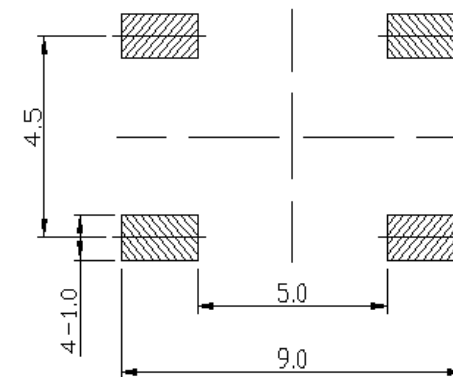

P.C.B LAND DIMENSION

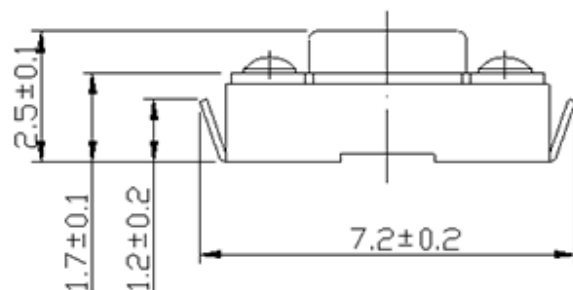

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	160±30gf/250±50gf
Operating Life	100,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	KNOB	NYLON	1	RED			DESCRIPTIONS OF REVISION			APPD.		
4	COVER	SUS	1	NATURAL	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: CMTDDZ-T6-6262GS-00			
3	TERMINAL	COPPER(0.3T)	4	PLATING SILVER								
2	CONTACT	F.Ag/SUS	1	NATURAL	MODEL: T6-6262GS-XX-H			SCALE: 3:1		DWN.	ERIC	2013-6-17
1	BASE	NYLON	1	BLACK						CHK'D	MAIKO	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			APPD.	Coco	2013-6-17		

DESCRIPTIONS OF REVISION

APPD.