


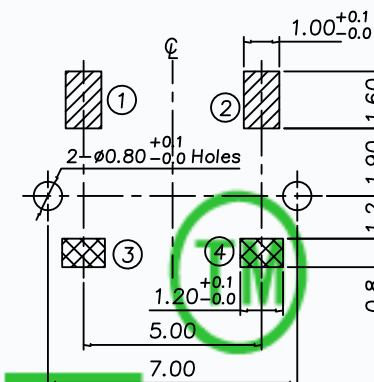
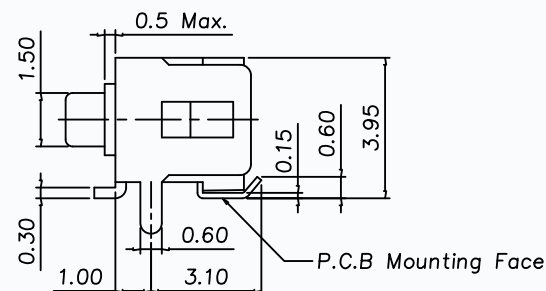





CAD FILE:

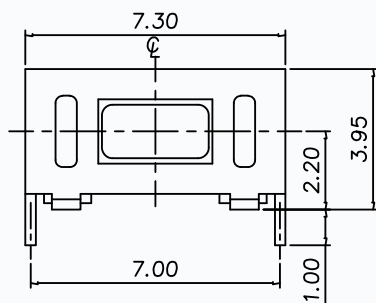

MODEL NO.	L(mm)	XX
T6-2040DC-XX	0.7	18=180GF
	1.4	25=20GF



P.C.B. LAND PATTERN

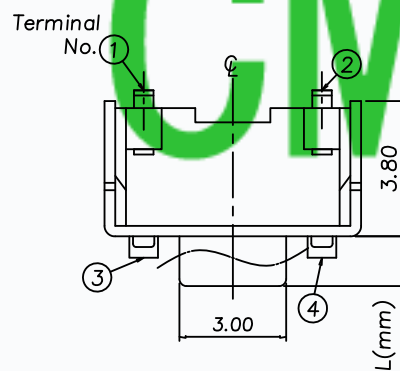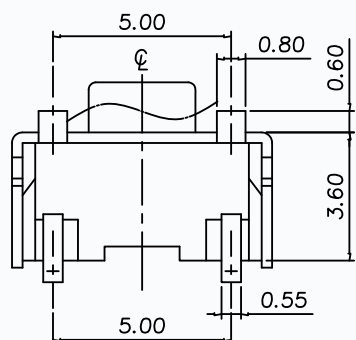

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	180±50gf/250±50gf
Operating Life	50,000 Cycles for 180gf, 30,000 Cycles for 250gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7											
6											
5	Cover	Brass	1	Ag Plate			DESCRIPTIONS OF REVISION			APPD.	
4	Stem	PA46	1	White	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: CMTDDZ-T6-2040DC-00		
3	Terminal	Phosphor Bronze	2	Ag Plate	MODEL: T6-2040DC-L-XX			SCALE: 3:1	DWN.	ERIC	2013-6-17
2	Contact	Stainless Steel	2	Ag Clad	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17	
1	Case	PA46	1	White				APPD.	Coco	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH							