

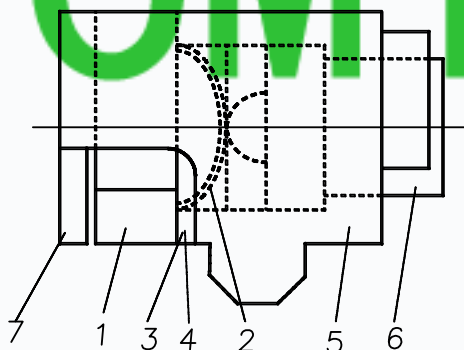
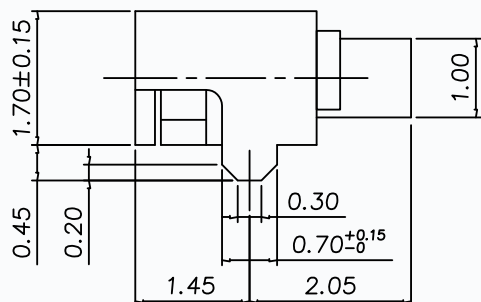

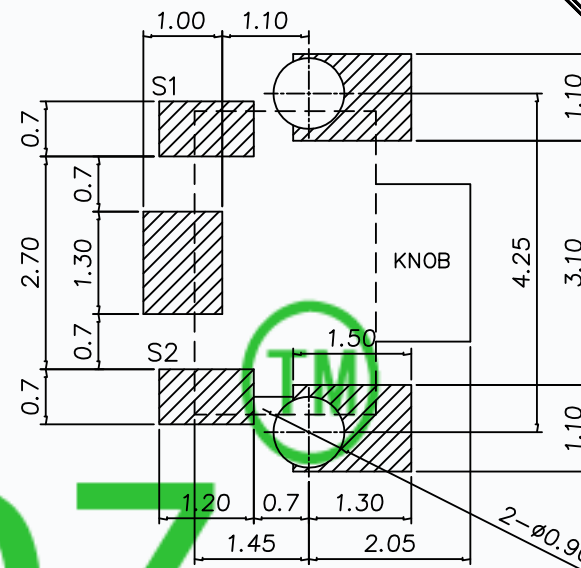
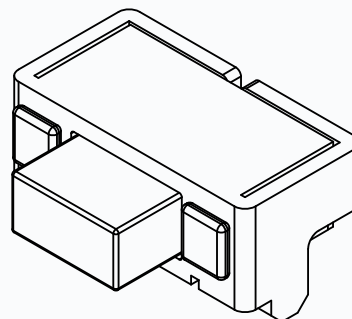


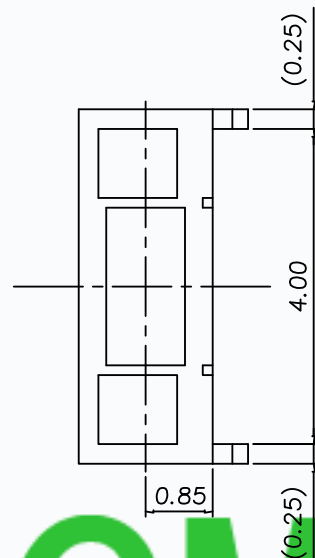

CAD FILE:

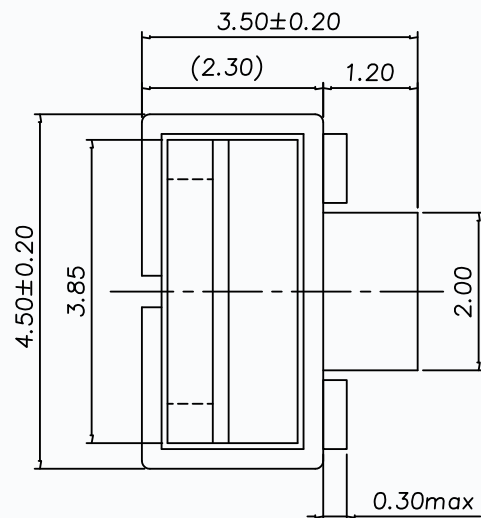

CIRCUIT DIAGRAM

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.2±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	160±50gf
Operating Life	100,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7	Cover	SPTE	1	Sn Plated							
6	Knob	PPA 30%GF	1	94HB							
5	Case	PPA 30%GF	1	94HB			DESCRIPTIONS OF REVISION				APPD.
4	Waterproof Sheet	PI FILM	1	94V-0	TITLE : WATERPROOF SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-2040BC-00		
3	Ashesive Sheet	PI FILM	1	94V-0	MODEL: T6-2040BC-XX		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	Contact	Stainless Steel	1	Ag Clad	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	Circuit Board	PCB 30%GF	1	94V-0					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							