


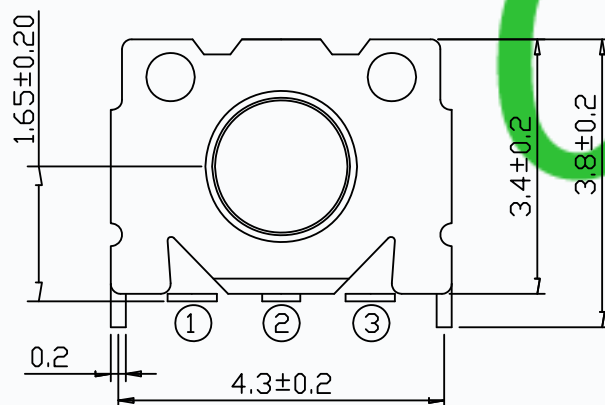


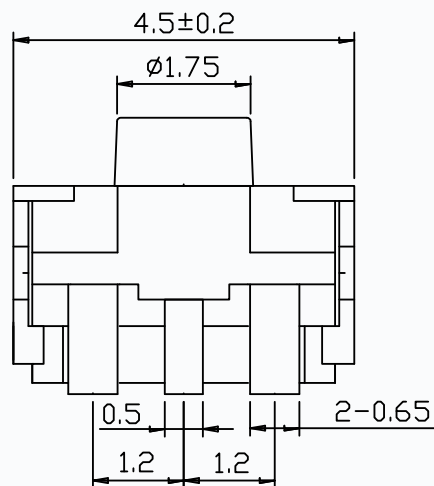


CAD FILE:

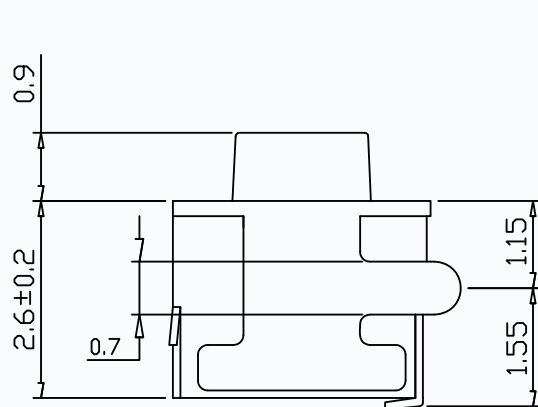

CIRCUIT DIAGRAM

MODEL NO.	XX
T6-3345C-XX	10=100GF
	16=160GF
	25=250GF

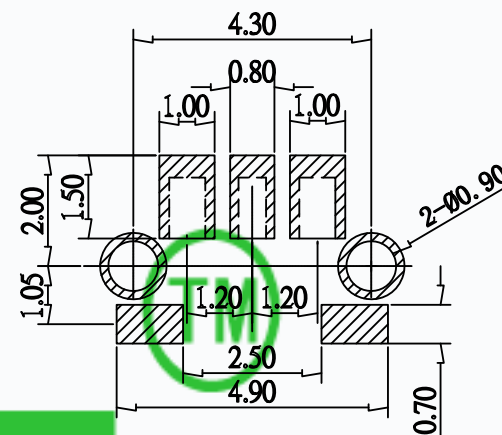

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.2±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	100±30GF/160±30GF/250±50GF
Operating Life	50,000 Cycles for 260gf , 100,000 Cycles for 100/160gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	KNOB	Nylon	1	Black			DESCRIPTIONS OF REVISION			APPD.		
4	COVER	SUS	1	Natural	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-3345C-00		
3	TERMINAL	Phosphor Bronze	3	Plating silver								
2	CONTACT	SUS	2	Plating silver	MODEL: T6-3345C-XX			SCALE: 3:1		DWN.	ERIC	2013-6-17
1	BASE	Nylon	1	Black								
NO.	PARTS	MATERIALS	Q'TY	FINISH	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			APPD.		CHK'D	MAIKO	2013-6-17