


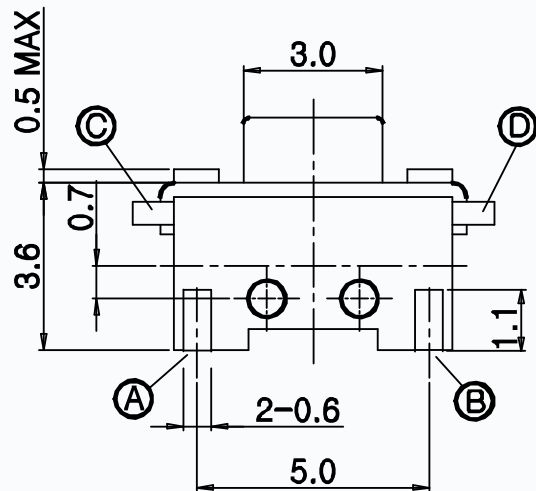
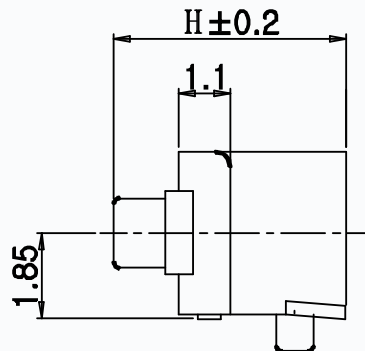


CAD FILE:

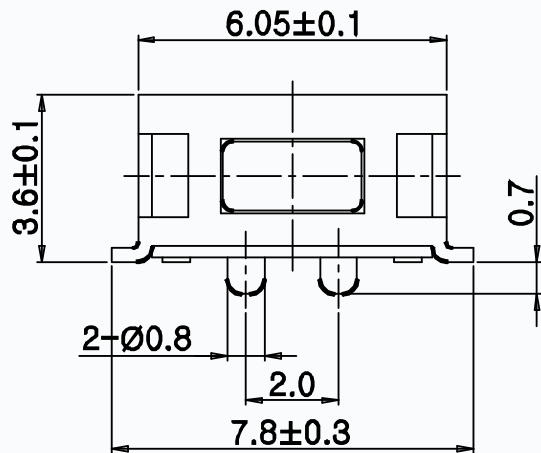

CIRCUIT DIAGRAM

MODEL NO.	H	XX
T6-3060C-H-XX	4.5MM	16=160GF
	5.0MM	25=20GF

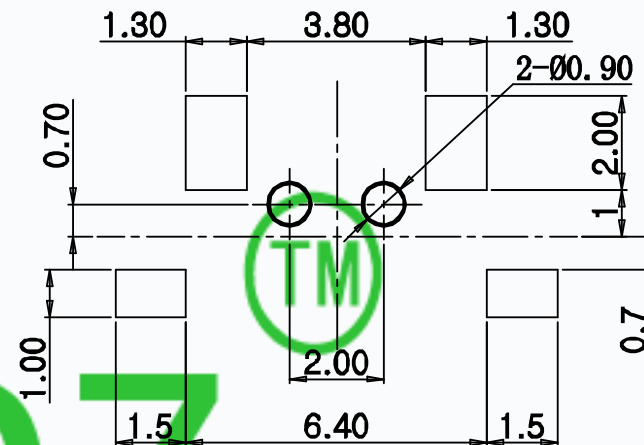

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	160±50gf/250±50gf
Operating Life	30,000 Cycles

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF DONGGUAN
TIANDU ELECTRONICS CO.,LTD. AND
SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
DONGGUAN TIANDU ELECTRONICS CO., LTD

DESCRIPTIONS OF REVISION

APPD.

8				
7				
6				
5	Cover	Brass	1	Ag Plate
4	Stem	Lcp	1	Black
3	Terminal	Brass	2	Ag Plate
2	Contact	Stainless Steel	1	Ag Clad
1	Case	Lcp	1	White
NO.	PARTS	MATERIALS	Q'TY	FINISH

TOLERANCE
UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

TITLE : TACT SWITCH

UNIT : mm

DRWG NO.: CMTDDZ-T6-3060C-00

MODEL: T6-3060C-XX

SCALE: 3:1

DWN. ERIC 2013-6-17

CMTDDZ 东莞市田都电子有限公司
DONGGUAN TIANDU ELECTRONICS CO.,LTD.

CHK'D MAIKO 2013-6-17

APPD. Coco 2013-6-17