


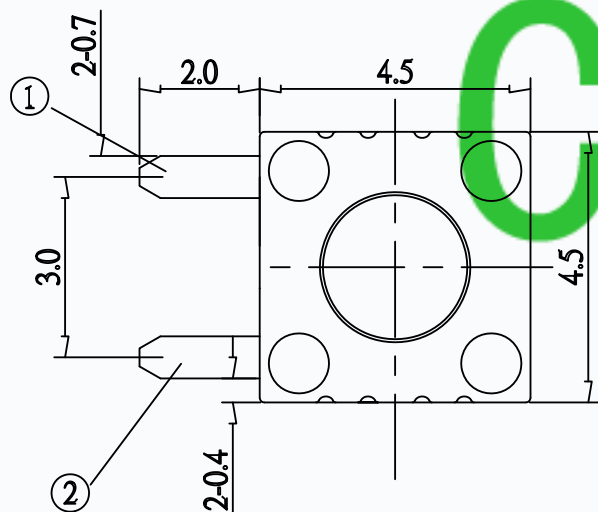



CAD FILE:

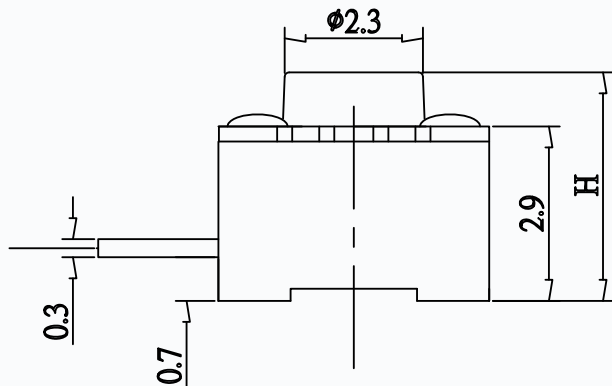

CIRCUIT DIAGRAM

MODEL NO.	XX	H
T6-4545AM-XX-H	10=100gf	3.8~9MM
	13=130gf	
	16=160gf	
	25=250gf	
	32=320gf	

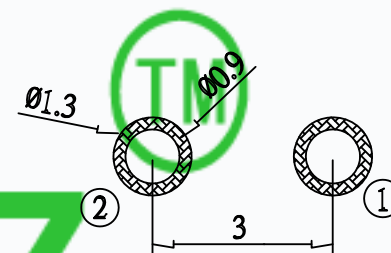

P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	100±30gf/130±30gf/160±50gf/250±50gf/320±50gf
Operating Life	100,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7										
6										
5	COVER	MILTD STEEL	1	PLATING NICKEL				DESCRIPTIONS OF REVISION		
4	KEYSTOKE	NYLON	1	BLACK/WHITE	TITLE : TACT SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T6-4545AM-00		
3	TERMINAL	BRASS	2	PLATING Ag	MODEL: T6-4545AM-XX-H		SCALE: 3:1	DWN.	ERIC	2013-6-17
2	CONTACT	SUS	1	Ag CLAD	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.		CHK'D	MAIKO	2013-6-17	
1	BASE	NYLON	1	BLACK						APPD.
NO.	PARTS	MATERIALS	Q'TY	FINISH						