
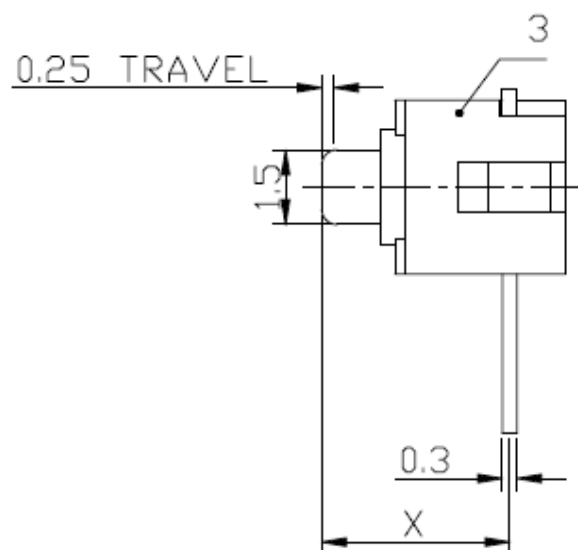


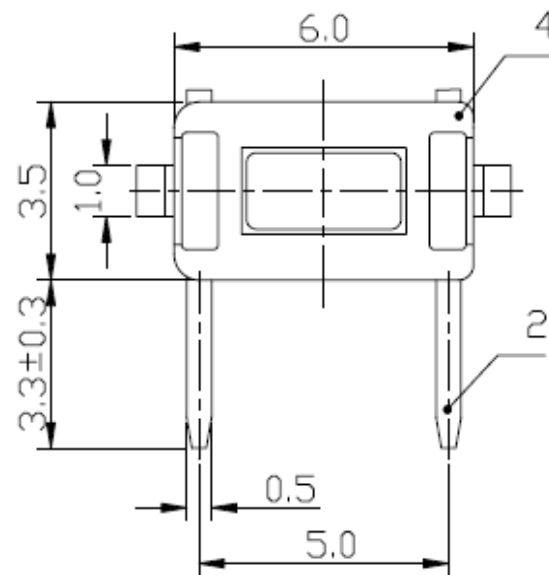

SCHEMATIC

MODEL NO.	XX	H
T6-3560M-XX-H	12=125GF	4.3MM
	16=160GF	
	26=260GF	5MM
	32=320GF	
	52=520GF	

SPECIFICATIONS	
Rating	50mA 12V DC
Travel	0.25±0.05mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	125±50/160±50/260±50/320±80/520±130gf
Operating Life	30,000 Cycles for260/320/520gf 50,000 Cycles for 125/160gf

8				TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7											
6											
5	COVER	SPCC	1			PLATING NICKEL	DESCRIPTIONS OF REVISION		APPD.		
4	KEYSTOKE	PA46	1	BLACK/WHITE	TITLE : TACT SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-3560M-00		
3	TERMINAL	BRASS(0.30t)	2	PLATING SILVER	MODEL: T6-3560M-XX-H		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	BASE	PA46	1	BLACK/WHITE					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							