

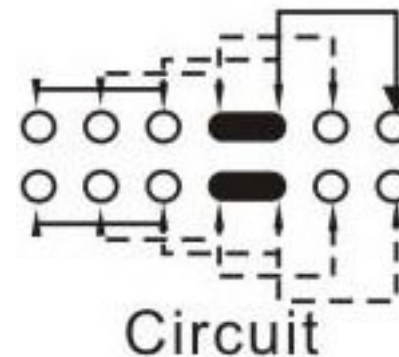
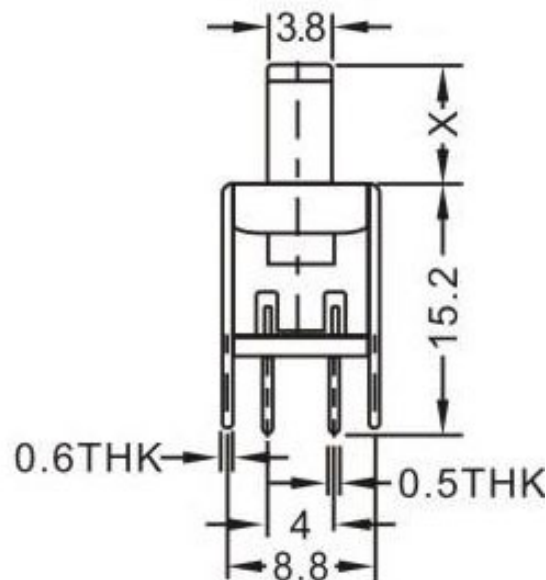
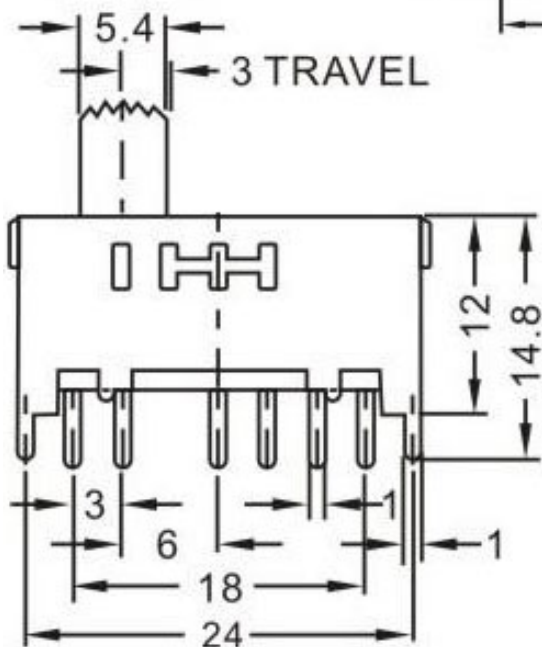


CAD FILE:

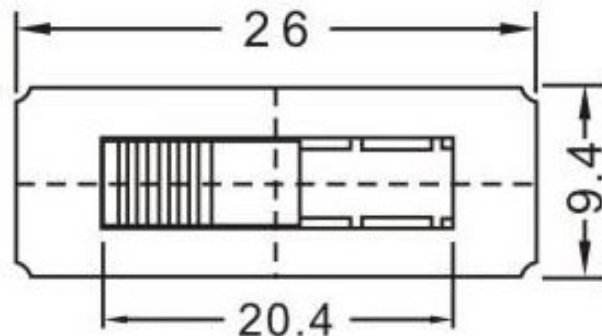

MODEL NO.	KNOB(G/VG)
T2-253002-X	(2~15)mm



SPECIFICATIONS

Rating	0.3A 30V DC
CIRCUIT	2P5T
Timing	SHORTING
Travel	3.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7	SPRING BALL	STELL	2	NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			DESCRIPTIONS OF REVISION			APPD.
4	TERMINAL	BRASS STRIP	12	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T2-253002-00		
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T2-253002-GX		SCALE: 3:1	DWN.	ERIC	2013-6-17
2	KNOB	POM	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED				APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH						