

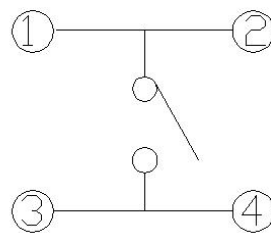
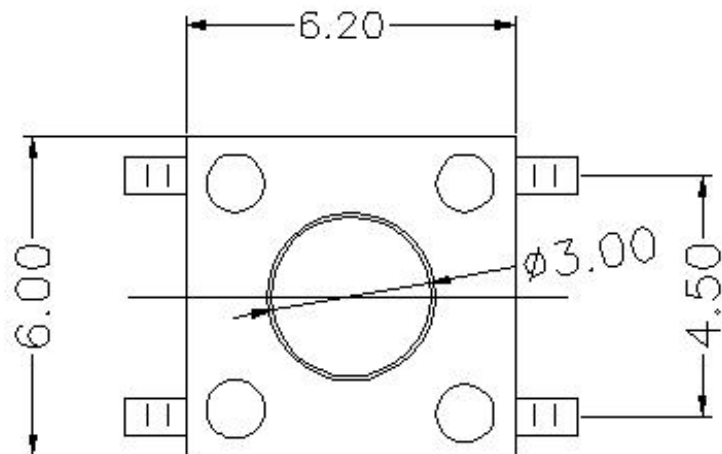
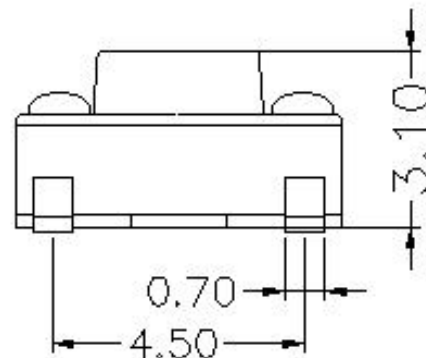


CAD FILE:

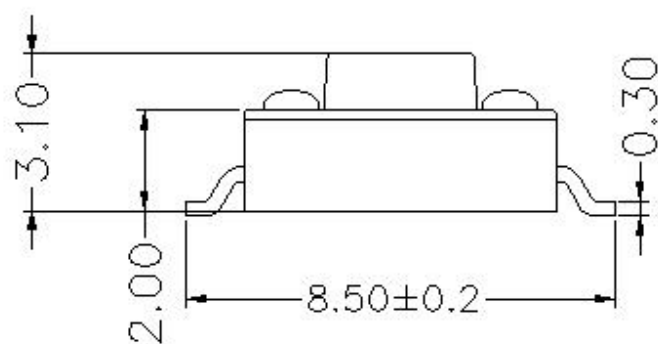

电器原理图

MODEL NO.	H(mm)
T6-6262HS-H	2.7
	3.1
	3.7
	4.3
	5.0

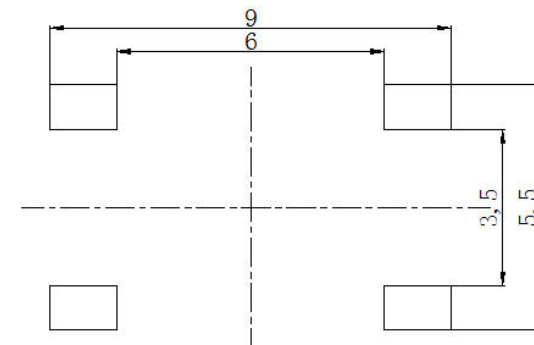

P C B 参考图

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	260±50gf
Operating Life	80,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	KNOB	NYLON	1	BLACK			DESCRIPTIONS OF REVISION			APPD.		
4	COVER	NYLON	1	BLACK	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-6262HS-00		
3	TERMINAL	BRASS(0.3T)	4	PLATING SILVER								
2	CONTACT	F.Ag/C5210	1	NATURAL	MODEL: T6-6262HS-H			SCALE: 3:1		DWN.	ERIC	2013-6-17
1	BASE	NYLON	1	BLACK						CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.		
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	Coco			