


CAD FILE:

DIMENSIONS

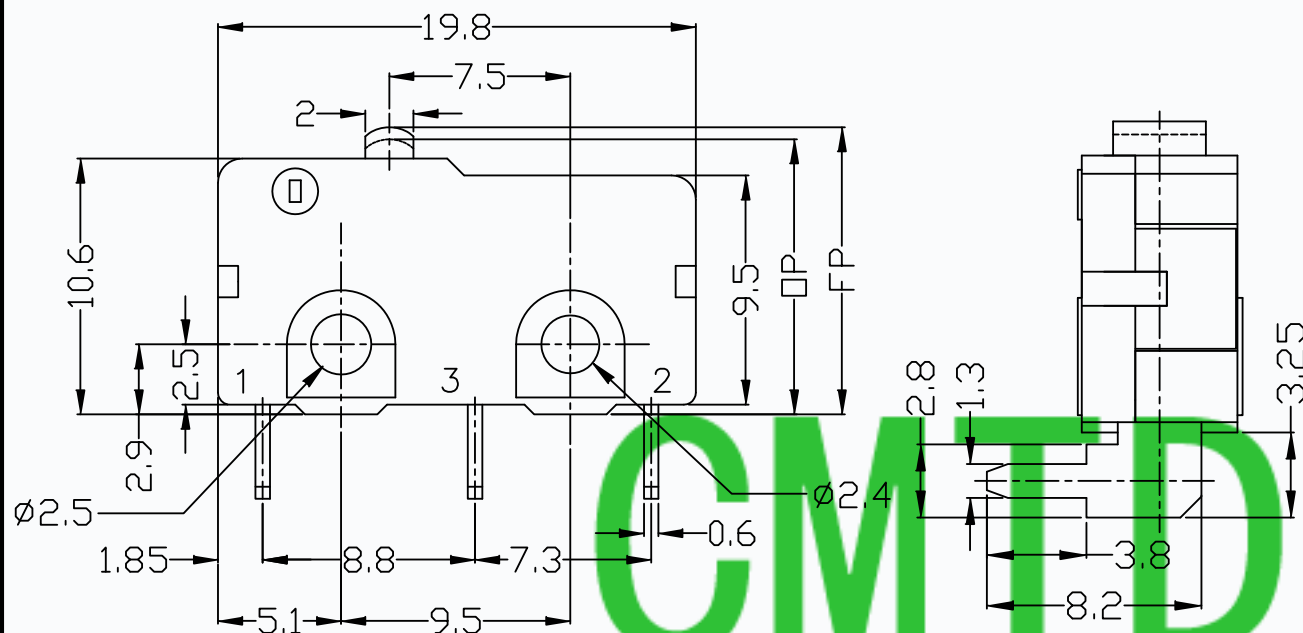

MODEL CODE

CM X-00 XX-X S-XX
1 2 3 4 5 6 7

1. Series: CM

2. Current Rating: 5=5A 125/250VAC
3=3A 125/250VAC


3. Actuator: 00=Non-lever

4. Termination: see chart (N/P/C/D/L)
(2=SPST-NO/3=SPST-NC)

5. Operating Force: see chart

6. Spring Material: S=SUS304

7. Number

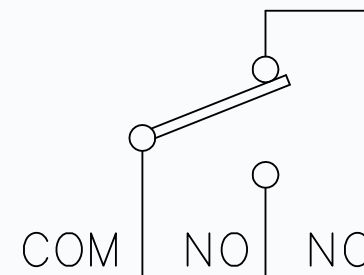

CIRCUIT DIAGRAM




1.Functional spec

1.1 Rated Voltage	125/250VAC
1.2 Rated Current	3A/ 5A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	115±30gf/175±45gf/250±50gf
1.5 Free Position	11.9±0.3mm
1.6 Operating Position	11.3±0.35mm

2.Reliable Rating



2.1 Mechanical Life	100,000CYCLES
2.2 Electrical Life	10,000CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V(Initial value)
2.4 Withstand Voltage	AC1,000V 1minute(Initial value)
2.5 Soldering Temper	Hand Soldering
2.6 Ambient Humidity Used	<85%RH

TOLERANCE UNLESS SPECIFIED				
TOLERANCE : ±0.2mm	A	2014-8-29	TIANDU ELECTRONICS	
	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
TITLE : MICRO SWITCH	UNIT : mm	DRWG NO.:TDU-CMX-00C-XS-01		
MODEL:SEE TABLE	SCALE:3:1	DWN.	ERIC	2012-12-12
CMTDDZ 东莞市田都电子有限公司		CHK'D	MAIKO	2012-12-12
DONGGUANSHI TIANDU ELECTRONIC CO.,LTD.		APPD	Coco	2012-12-12





CAD FILE:

Terminal Type

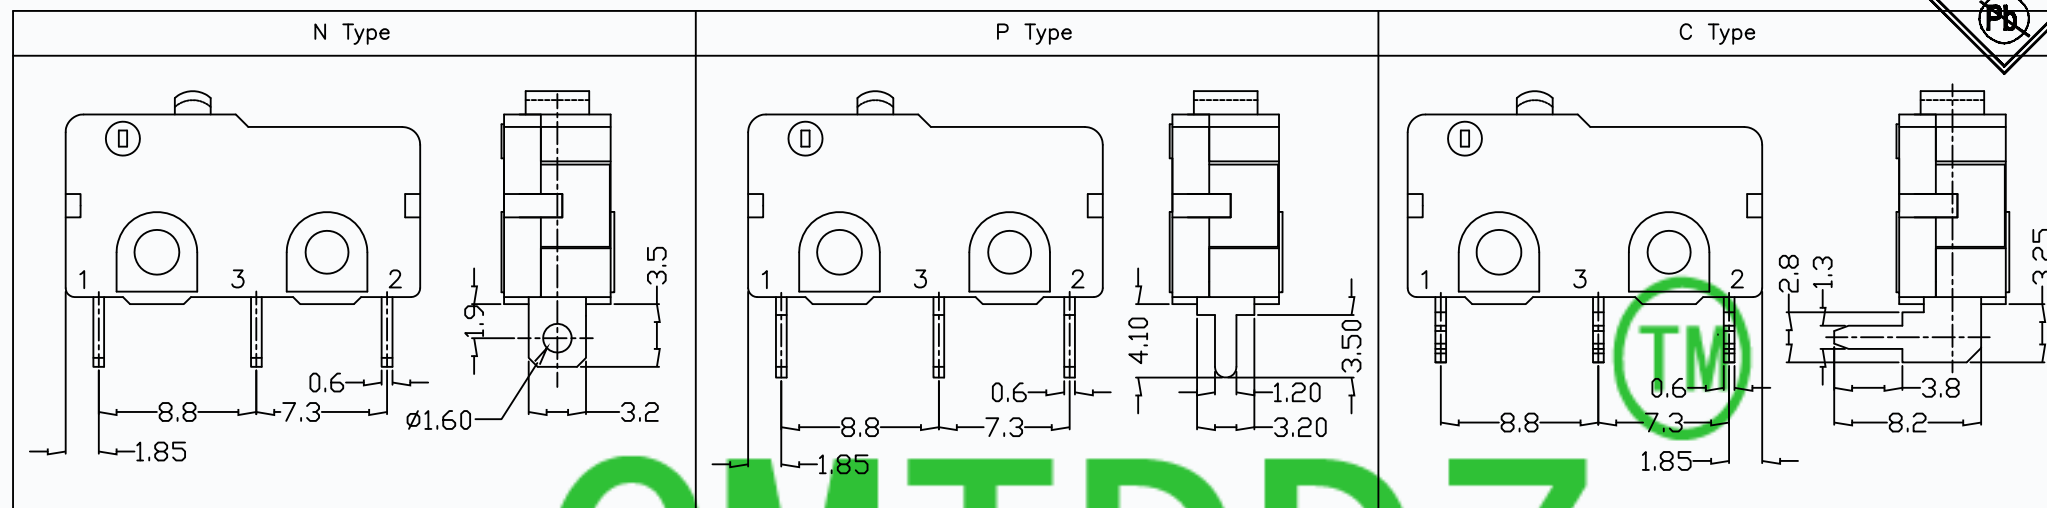

Structure chart

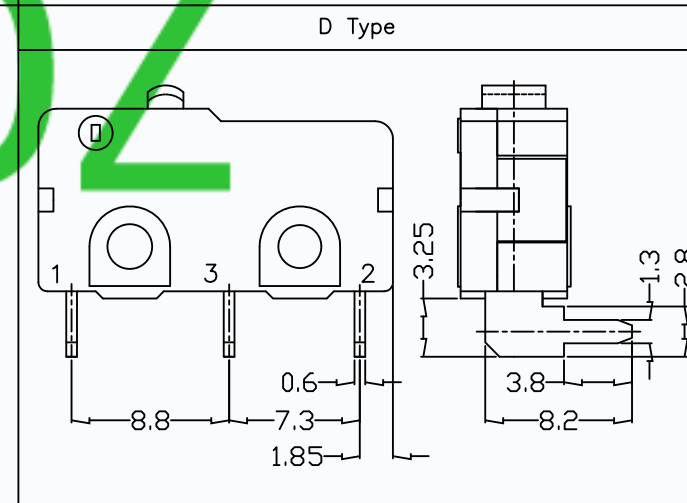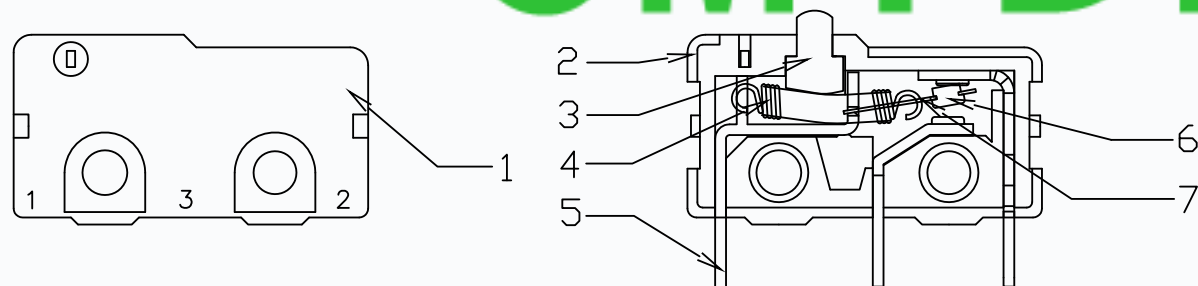

Material list

8					TOLERANCE					
7	Change Plate	C5210	1		UNLESS SPECIFIED					
6	Contact	Compound silver	1		TOLERANCE : $\pm 0.2\text{mm}$	A	2014-8-29	TIANDU ELECTRONICS		
5	Terminal	C2680	3			ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	Spring	SUS304	1		TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.:TDU-CMX-00C-XS-01	
3	Button	PBT	1		MODEL:SEE TABLE			SCALE:3:1	DWN.	ERIC
2	Lower Housing	PBT	1		CMTDDZ 东莞市田都电子有限公司 DONGGUANSHI TIANDU ELECTRONIC CO.,LTD.				CHK'D	MAIKO
1	Upper Housing	PBT	1						APPD	Coco
NO.	PARTS	MATERIALS	Q'TY	FINISH						