



CAD FILE:

DIMENSIONS

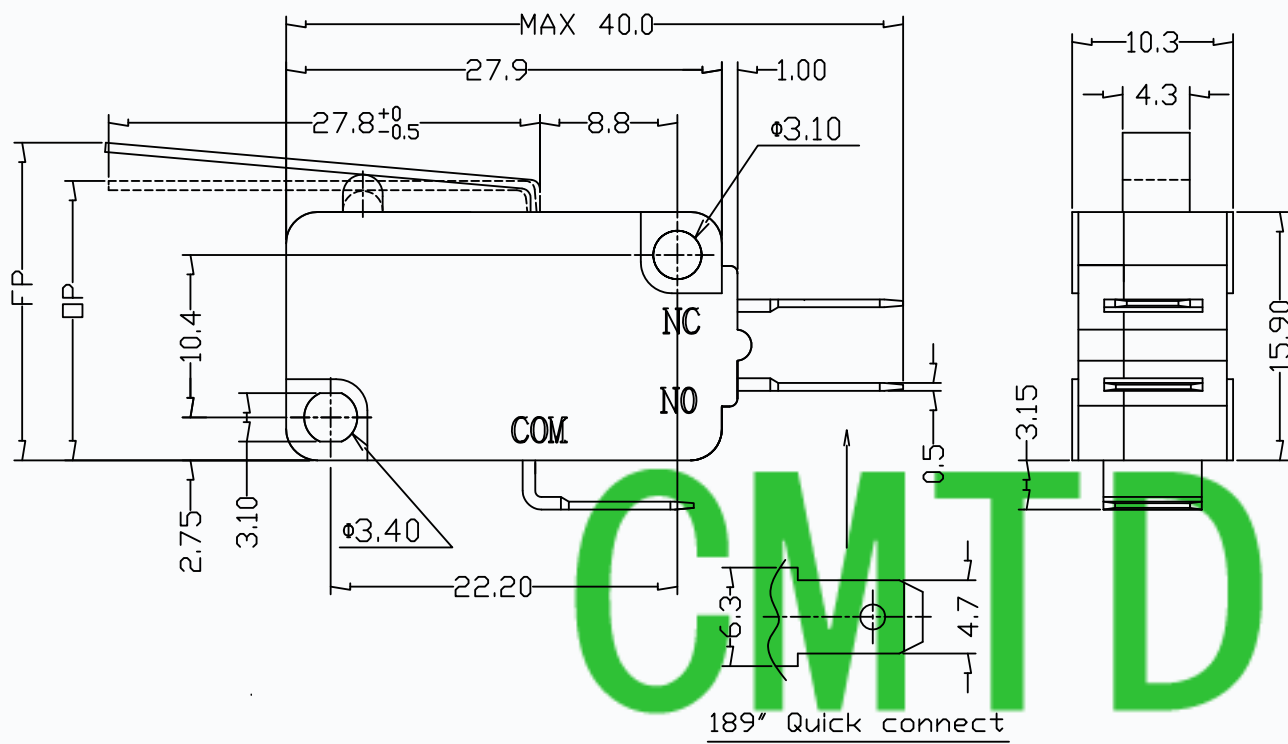

CIRCUIT DIAGRAM

1.Functional spec

1.1 Rated Voltage	125/250VAC
1.2 Rated Current	6A/10A/15A/20A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	75±25gf/105±30gf
1.5 Free Position	20.8±1.0mm
1.6 Operating Position	18.3±1.0mm

2.Reliable Rating

2.1 Mechanical Life	1,000,000CYCLES
2.2 Electrical Life	10,000CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V(Initial value)
2.4 Withstand Voltage	AC1,500V 1minute(Initial value)
2.5 Soldering Temper	Hand Soldering
2.6 Ambient Humidity Used	<85%RH

MODEL CODE

VM XX-00 XX-X S-XX
1 2 3 4 5 6 7

1. Series: VM

2. Current Rating: 06=6A 125/250VAC
10=10A 125/250VAC
15=15A 125/250VAC
20=20A 125/250VAC

3. Actuator: 00=Non-lever 01-99=Lever


4. Termination: see chart (N/K/J/L/W/A)
(7=SPST-NO/16=SPST-NC)

5. Operating Force: see chart


6. Spring Material: S=SUS304

7. Number


TOLERANCE UNLESS SPECIFIED				
TOLERANCE : ±0.2mm	A	2014-8-29	TIANDU ELECTRONICS	
	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
TITLE : MICRO SWITCH	UNIT : mm	DRWG NO.:TDU-VMXX-00XX-XS-XX		
MODEL:SEE TABLE	SCALE:3:1	DWN.	ERIC	2012-12-12
CMTDDZ 东莞市田都电子有限公司	CHK'D	MAIKO		2012-12-12
DONGGUANSHI TIANDU ELECTRONIC CO.,LTD.	APPD	Coco		2012-12-12



Terminal Type

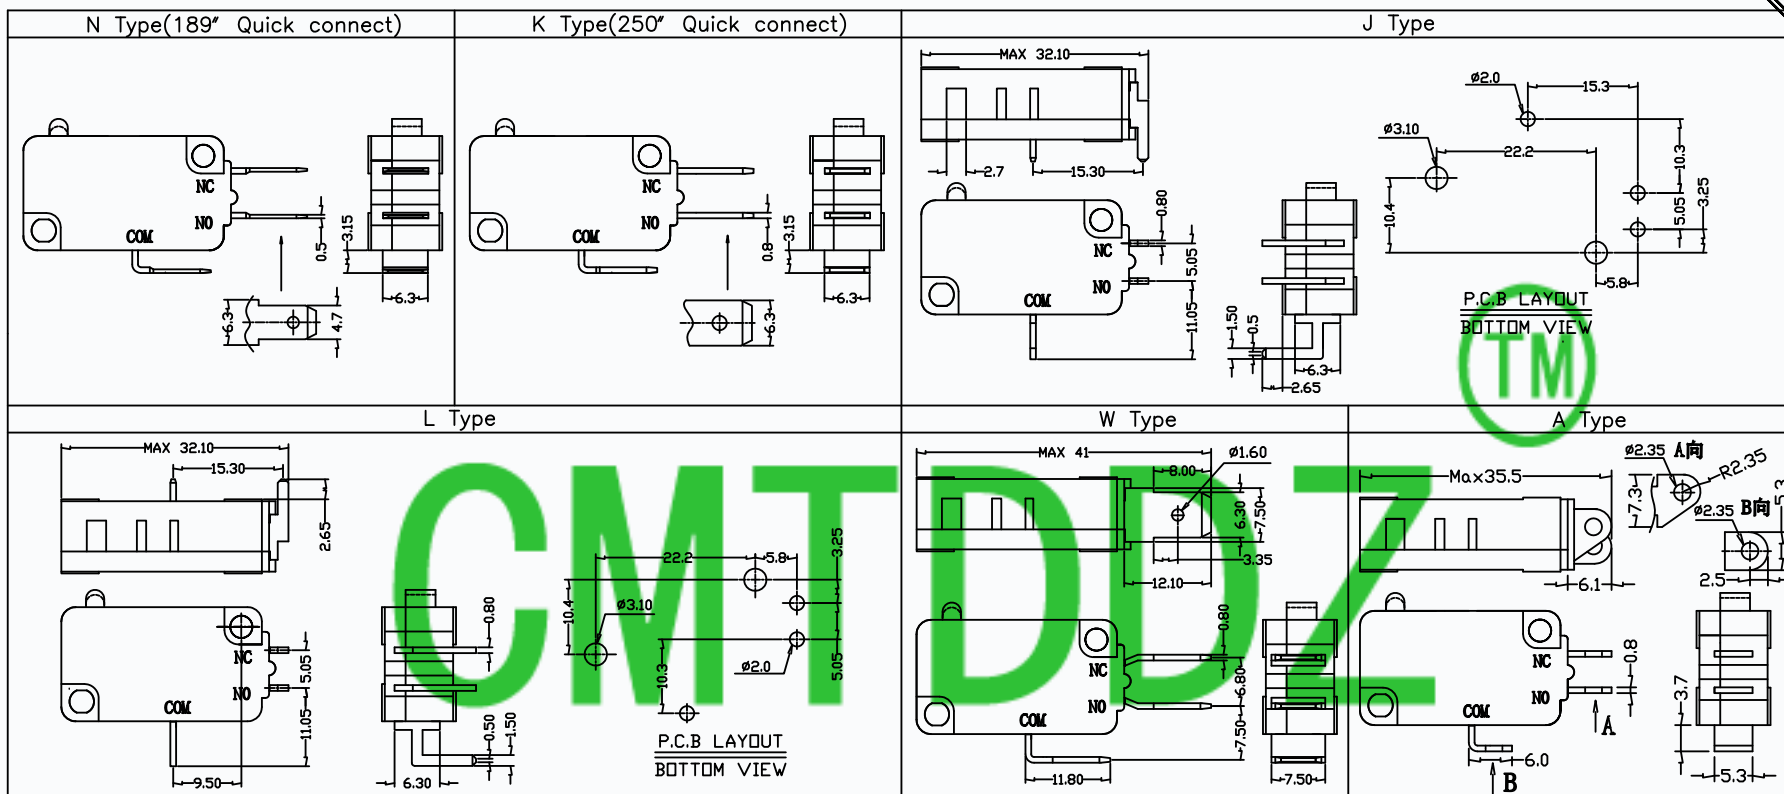

Structure chart

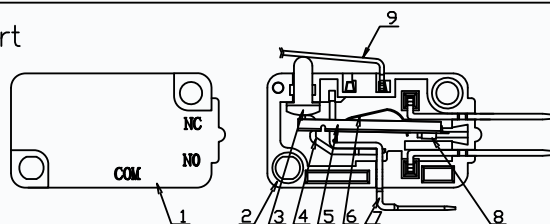

Material list

8	Contact	Silver alloy	3	Silver Plating	TOLERANCE UNLESS SPECIFIED						
7	Terminal	C2680	3	Silver Plating							
6	Spring Plate	C5210	1		TALERANCE : ±0.2mm	A	2014-8-29	TIANDU ELECTRONICS			
5	Change Plate	C2680	1			ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	Fixed Rod	C2680	1		TITLE : MICRO SWITCH			UNIT : mm		DRWG NO.:TDU-VMXX-00XX-XS-XX	
3	Button	PBT	1	Black	MODEL:SEE TABLE			SCALE:3:1		DWN, ERIC 2012-12-12	
2	Lower Housing	PBT	1	Black	CMTDDZ 东莞市田都电子有限公司 DONGGUANSHI TIANDU ELECTRONIC CO.,LTD.			CHK'D MAIKO		2012-12-12	
1	Upper Housing	PBT	1	Black				APPD Coco		2012-12-12	
NO.	PARTS	MATERIALS	Q'TY	FINISH							