
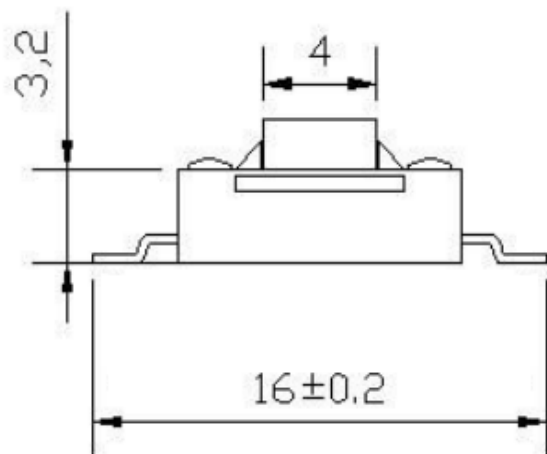
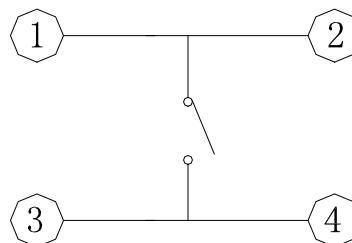


P.C.B. LAND PATTERN

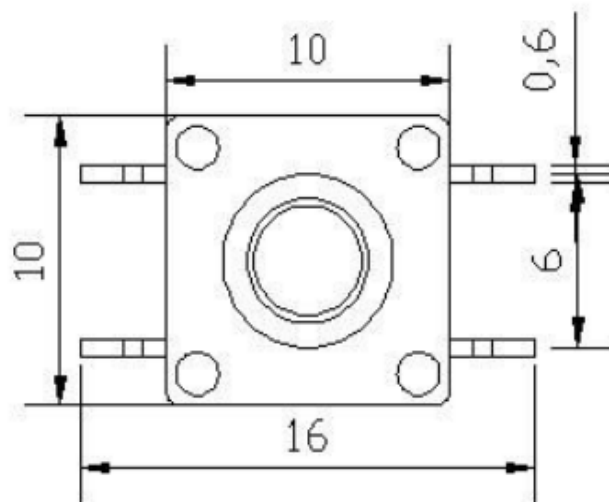

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.4±0.2mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	260±50gf
Operating Life	100,000 Cycles
Ip Rating	IP66

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7	GASKET	NYLON	1	-----							
6	KNOB	NYLON	1	RED							
5	COVER	SUS	1	-----			DESCRIPTIONS OF REVISION				APPD.
4	WATERPROOF SILICONE	SILICA GEL	1	-----	TITLE : WATERPROOF SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-1010AS-00		
3	TERMINAL	BRASS(0.3T)	4	PLATING SILVER	MODEL: T6-1010AS		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/C5210	1	-----	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							