

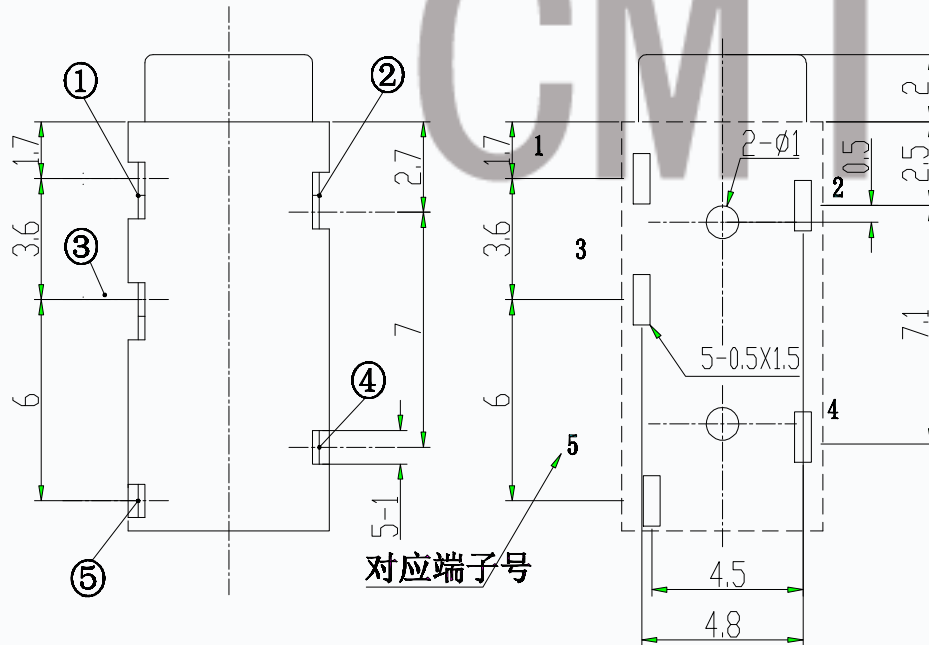
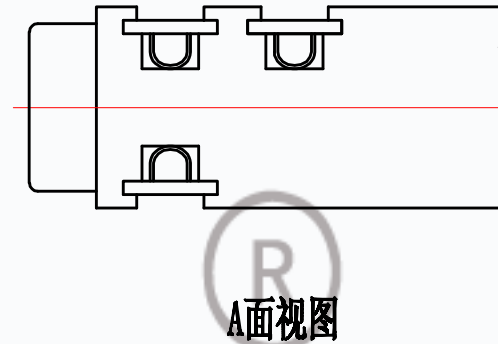
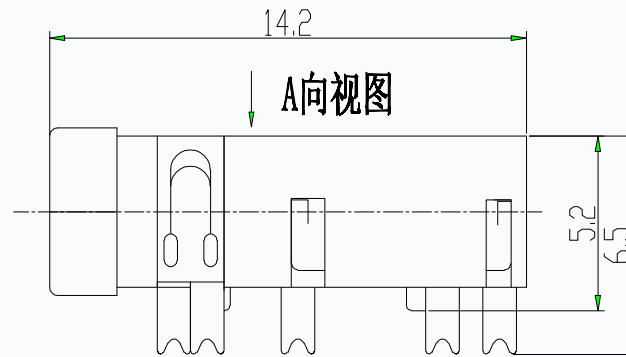


REVISIONS							
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN	CHECKED	APPROVED
A			INITIAL RELEASE	2009/6/27	R.YU		

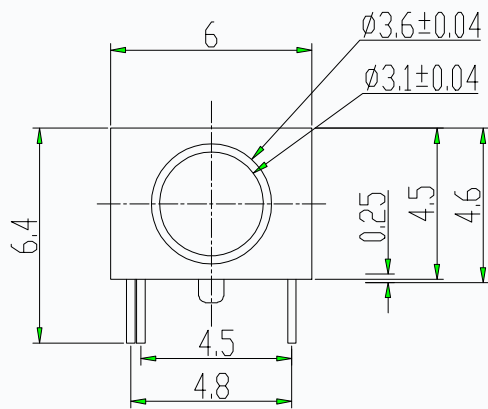

对应端子号



NOTES:

- CONTACT CURRENT RATING: 1.0A.
- CONTACT RESISTANCE: 50 mohm MAX.;
- INSULATION RESISTANCE: 1000MEGOHMS MIN.;
- DIELECTRIC WITHSTANDING: 300V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 0.30~3.00Kgf;
- CONNECTOR UNMATING FORCES: 0.30~3.00Kgf.;

MEASURE POINT: (XX)
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGULAR ±3°

东莞市田都科技有限公司

DONGGUAN TIANDU TECHNOLOGY CO.,LTD

DESIGN	SMITH	DATE	2009/6/25	ø3.50mm PHONE JACK 4POLE DIP TYPE		
CHECKED		DATE				
APPROVED		DATE		CUSTOMER DRAWING		
PART NO.	T13-3527A-6P			REV.: A	SCALE: 1:1	UNIT: mm
DRAWING NO.	CMTDDZ-3527A			SIZE: A4	SHEET: 1/1	