
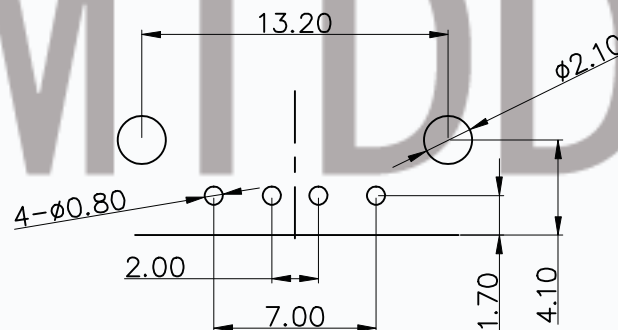
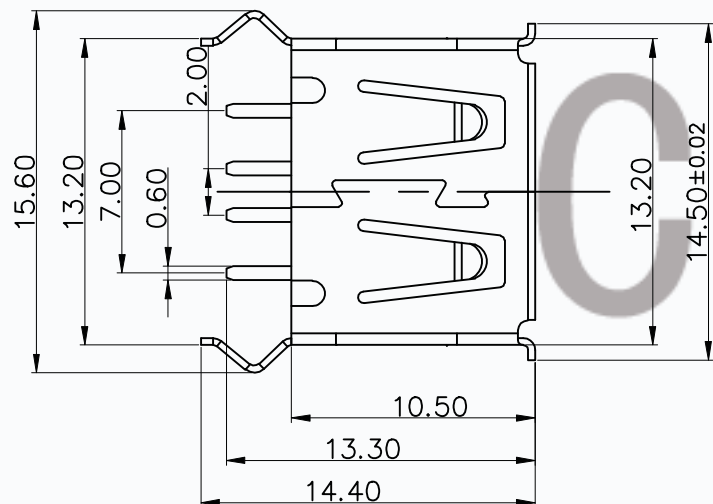
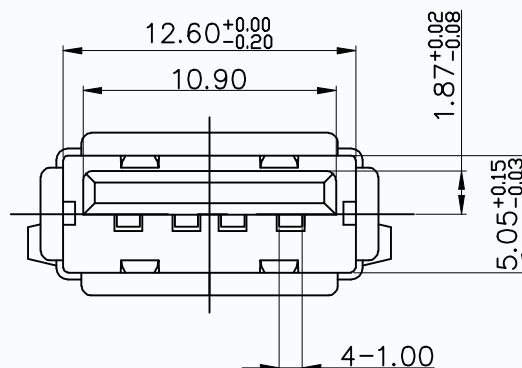


RoHS Compliant

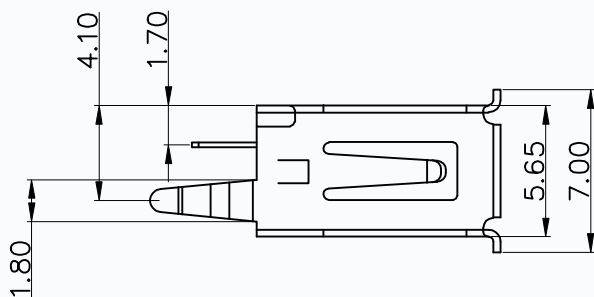

规格说明: Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A—2A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触电阻: Contact Resistance
30 milliohms MAX
- 4.耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)
3. 寿命: Durability
1500 CYCLES MIN

T10-2F105D-X X X X X X X X

B=盐雾24H C=盐雾48H

包装方式PACK:

2: 盘装 3:管装 4: 载带

端子电镀SPRING PLATING:

0: 镀金GF 5:5u" 6:15u" 8:30u"

端子材质SPRING CONTACT:

C:黄铜 P:磷铜

外壳电镀SHELL PLATING:

N:镀镍 T:镀锡

外壳材质SHELL:


S:不锈钢 C:黄铜 A:冷轧钢板

塑胶颜色HOUSING COLOUR:

W:白色 B:黑色 L:蓝色 Y:黄色 G:绿色

塑胶材质HOUSING:

0:PBT 3:LCP 6:PA-6T 9:PA-9T

CMTDDZ 东莞市田都科技有限公司 Dongguan Tiandu Technology Co.,Ltd TEL:0769-85384807 FAX:0769-85384842		图号 (DWG NO)		单位(UNIT): MM
		版本 (REV)	A/0	比例(SCALE) 1:
		日期 (DATE)	2015. 06. 09	
		设计 (DESIGN)	ERIC	未 注 公 差 TOLERANCE UNSPECIFIED I X ±0.30 I XX ±0.20 I XXX ±0.10 I * ±5° I X * ±2°
		审核 (CHECKED)	~	
核准 (APPROVED)				
品名 (ITEM NO)	USB A/F 180度短体10.5卷边弯脚DIP			
料号 (PART NO)	T10-2F105D-XXXXXXX			
模号 (MODEL NO)	N/A			