
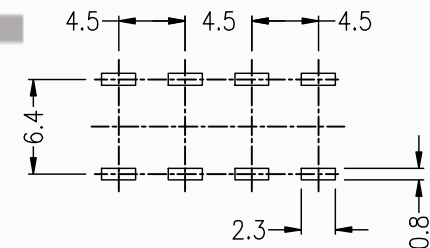
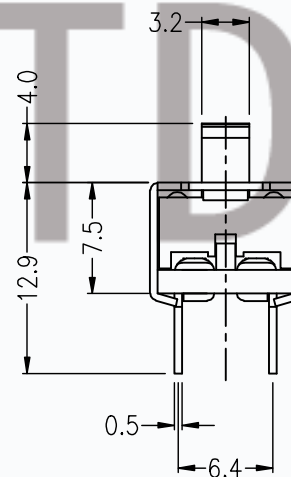


Rating	UL cUL: 3A 250VAC/6A 125VAC
Contact Resistance	100mΩ MAX
Insulation Resistance	100MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	600+/-200 gf
Life test without load	10000 Cycles
Ambient Temperature Used	-25° C To 105° C

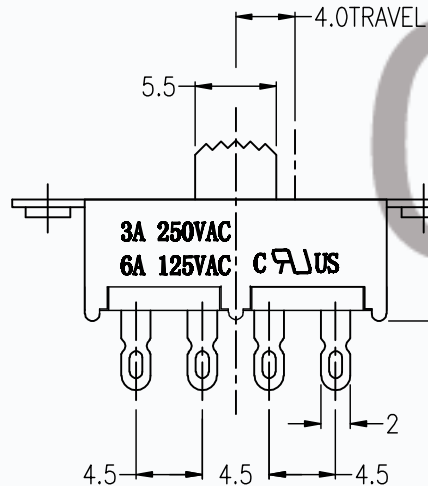

®

8	SPRING COIL	STEEL WIRE	1	NATURAL	TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL		A	2021-July-28	初版			
6	SPRING COIL	STEEL WIRE	4	NATURAL	WITHIN 1.5mm : ±0.1mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED	OVER 1.5mm : ±0.2mm	PROJECT AGL: 		CAD FILE: T4-234501A-G			
4	TERMINAL	COPPER ALLOY	8	Ag PLATED	TITLE : AC VERTICAL SLIDE SWITCH			UNIT : mm	P/N: 1010146010144010		
3	BASE	HTPA	1	BLACK	MODEL: T4-234501A-G4			SCALE: 2 : 1	DWN.	ERIC	2021-July-28
2	METAL COVER	STEEL STRIP	1	BLACK	东莞市田都科技有限公司 DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD			CHK'D	JEFF	2021-July-28	
1	KNOB	HTPA	1	WHITE				APPD.	DAVIE	2021-July-28	
NO.	PARTS	MATERIALS	Q'TY	FINISHING							