


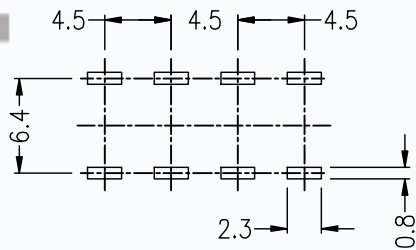
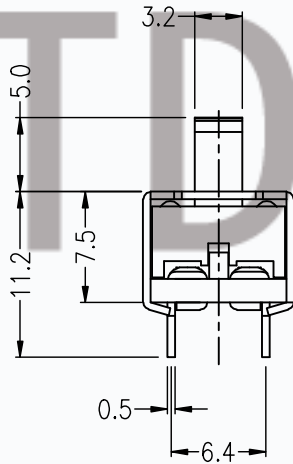


产品规格 Specifications:

Rating	UL cUL: 3A 250VAC/6A 125VAC
Contact Resistance	100mΩ MAX
Insulation Resistance	100MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	600+/-200 gf
Life test without load	10000 Cycles
Ambient Temperature Used	-25° C To 105° C

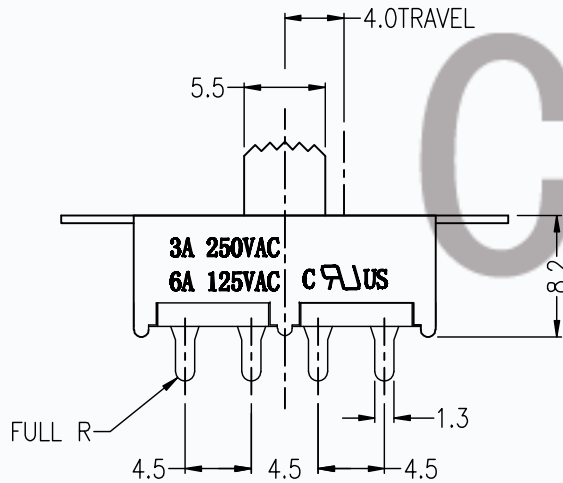

SCHEMATIC(NON-SHORTING)

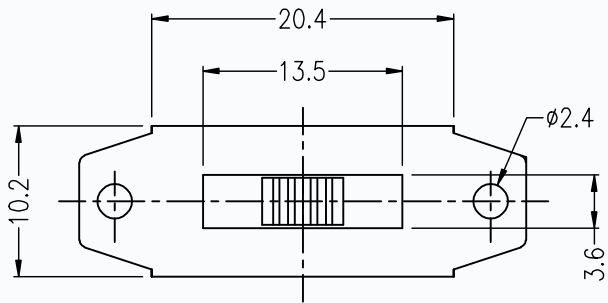

P.C.BOARD LAYOUT

8	SPRING COIL	STEEL WIRE	1	NATURAL	TOLERANCE UNLESS SPECIFIED						
7	STEEL BALL	STEEL	1	NATURAL		A	2021-July-28	初版			
6	SPRING COIL	STEEL WIRE	4	NATURAL	WITHIN 1.5mm : ±0.1mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED	OVER 1.5mm : ±0.2mm	PROJECT AGL: 		CAD FILE: T4-234504A-G			
4	TERMINAL	COPPER ALLOY	8	Ag PLATED	TITLE : AC VERTICAL SLIDE SWITCH			UNIT : mm	P/N: 1010146020134040		
3	BASE	HTPA	1	BLACK	MODEL: T4-234504A-G5			SCALE: 2 : 1	DWN.		
2	METAL COVER	STEEL STRIP	1	BLACK	东莞市田都科技有限公司 DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD			CHK'D			
1	KNOB	HTPA	1	BLACK				APPD.			
NO.	PARTS	MATERIALS	Q'TY	FINISHING				APPD.			