

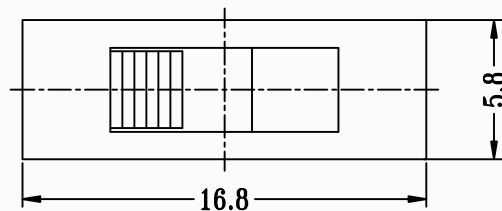
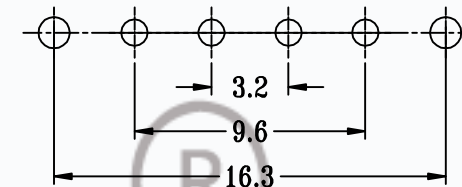
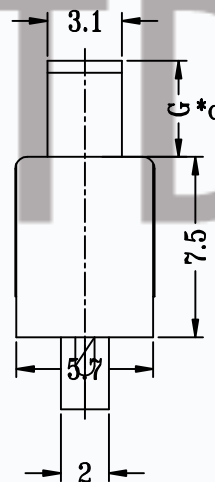


CAD FILE:T2-133004-G

MODEL NO.	KNOB(G/VG)
T2-133004-G	(2~15)mm

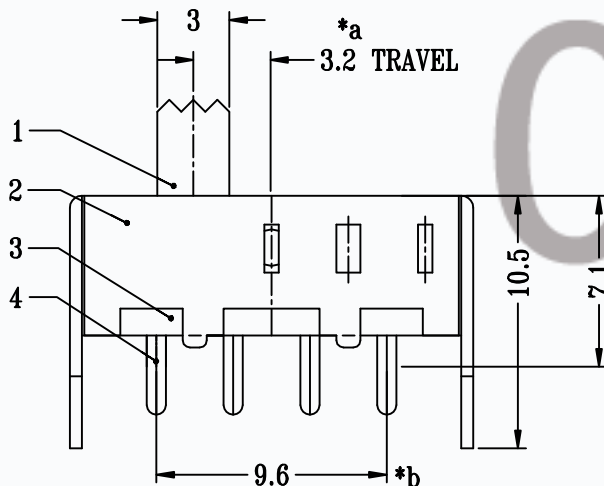

SCHEMATIC (NON-SHORTING)

P.C.B LAYOUT
BOTTOM VIEW

SPECIFICATIONS	
Rating	0.3A 50V DC
CIRCUIT	1P3T
Timing	NON-SHORTING
Travel	3.2mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD						
7	STEEL BALL	STEEL	1	NATURAL								
6	SPRING	STEEL WIRE	1	NATURAL								
5	CONTACT CLIP	PBS C5210R-EH	1	Ag PLATED								
4	TERMINAL	BRASS STRIP	4	Ag PLATED OVER Ni PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T2-133004-00			
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T2-133004-G		SCALE: 3:1		DWN.	ERIC	2013-6-17	
2	FRAME	STEEL STRIP	1	NI PLATED	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.				CHK'D	MAIKO	2013-6-17	
1	KNOB	POM	1	BLACK					APPD.	Coco	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH								
DESCRIPTIONS OF REVISION												APPD.