

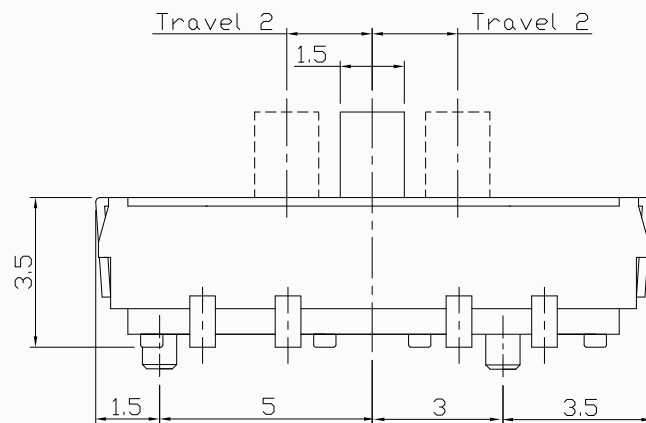
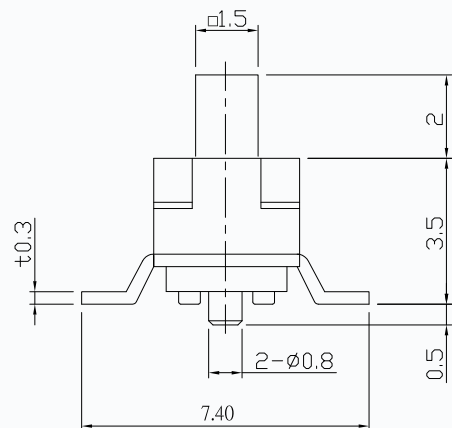



CAD FILE:



MODEL NO.	KNOB(G)
T1-2390S-G	(2~8)mm

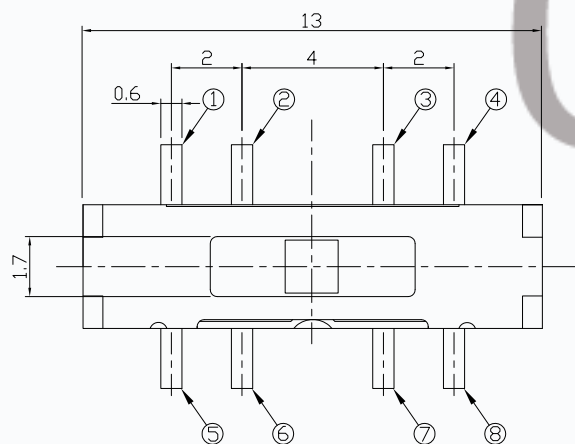

CIRCUIT DIAGRAM

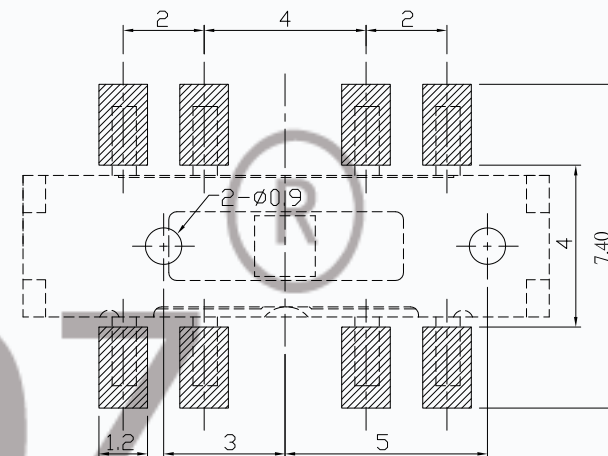

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	> 100 M Ω
Dielectric Withstanding Voltage	500V 0.5mA/min
Contact Resistance	< 70 m Ω
Operating Force	200gf $\pm$ 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	2014-8-31	TIANDU ELECTRONICS		
5	CLIP	BECU	2	Ag PLATED	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		
4	TERMINAL	PHOSPHOR BRONZE	8	Ag PLATED	TITLE : MINI SLIDE SWITCH			UNIT : mm	DRWG NO.:CMTDDZ-T1-2390S-00	
3	CASE	PA46	1	BLACK	MODEL: T1-2390S-G			SCALE:3:1		
2	COVER	SUS	1	Nature	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			DWN.	ERIC	2014-8-31
1	SLIDER	PA46	1	BLACK				CHK'D	MAIKO	2014-8-31
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD	Coco	2014-8-29