



CAD FILE:

MODEL NO.

XX

H(mm)

L(mm)

T6-6262AS-XX-L-H

18=180GF

25=250GF

3.3

4.3

4.5

5.0

7.0




2.8

3.15


3.15

3.15

3.15

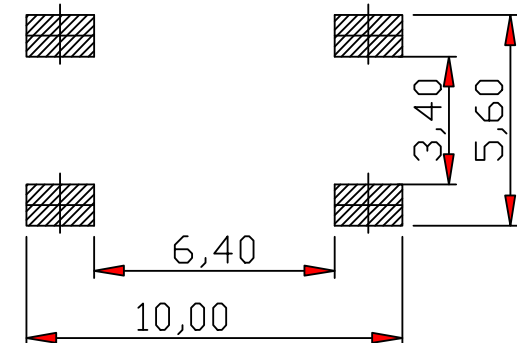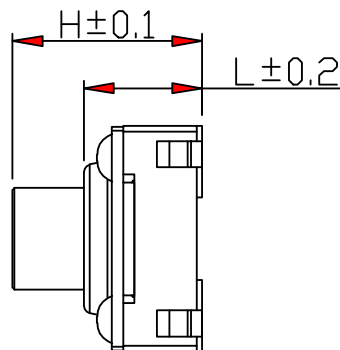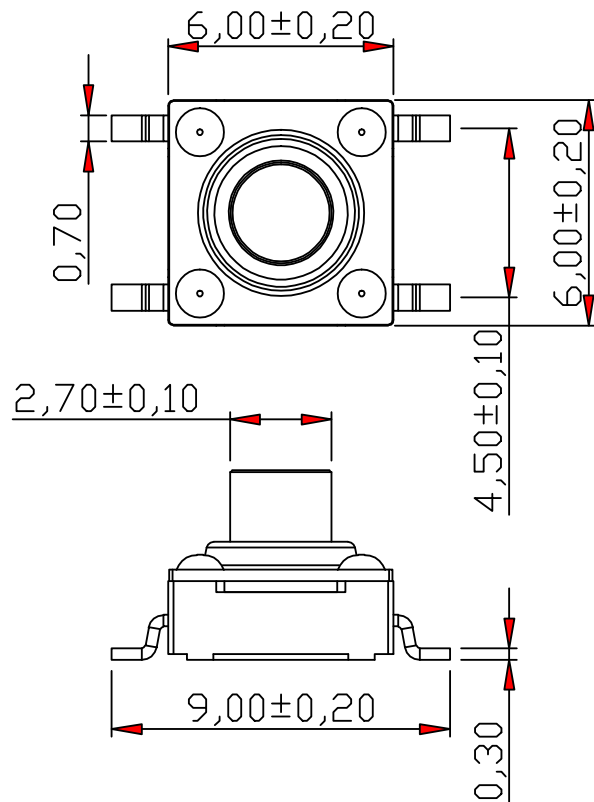

P.C.B. LAND PATTERN



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.3±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	180±30GF/250±30GF
Operating Life	500,000 Cycles
I _p Rating	IP67

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD					
7											
6	KNOB	PPA	1	RED							
5	COVER	SUS	1	-							
4	WATERPROOF SILICONE	SILICA GEL	1	BLACK	TITLE : WATERPROOF SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T6-6262AS-00		
3	TERMINAL	COPPER	4	PLATING SILVER	MODEL: T6-6262AS-XX-L-H		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	BASE	PPA	1	BLACK					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH					DESCRIPTIONS OF REVISION		
									APPD.		