


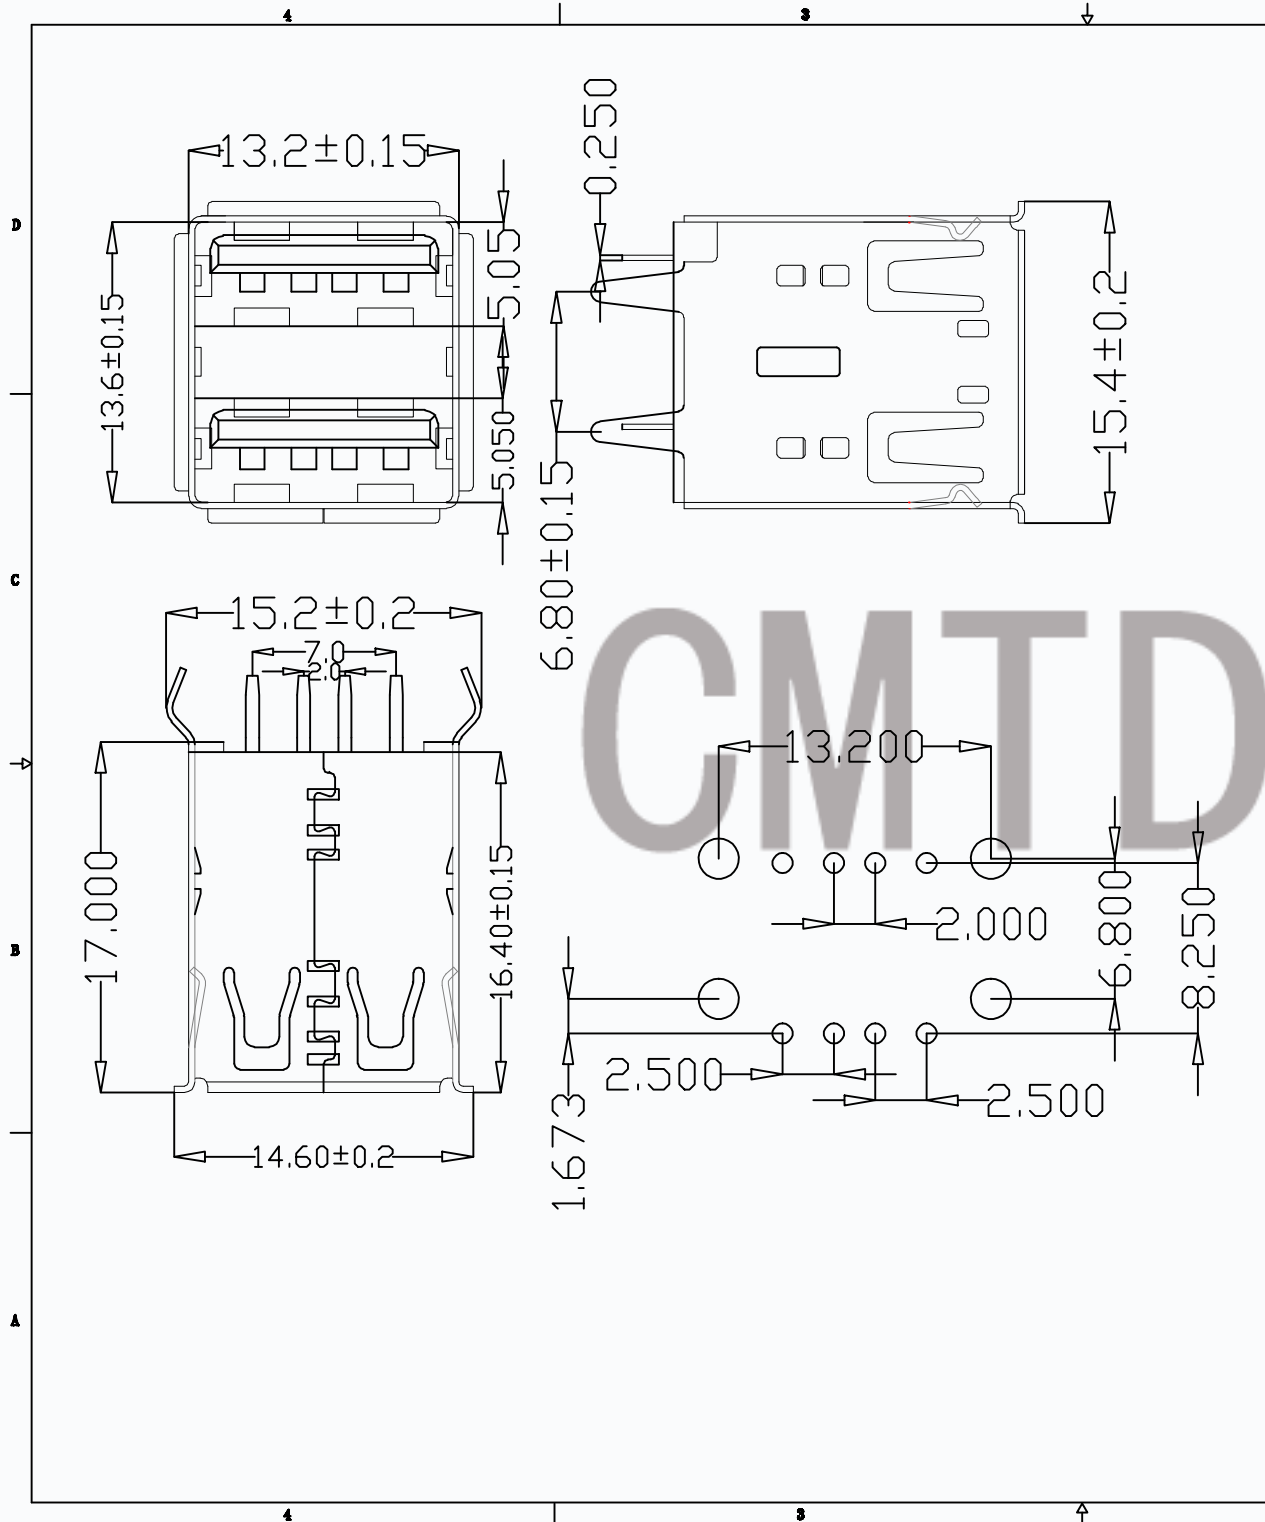

REV	LTR	DESCRIPTION	DATE	APPROVED

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
3A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.02kgf (MIN)

原材料:Matorial:

1. 塑胶:Housing: UL 94v-o PBT white
Hing Temperature Tnermaplastics,
2. 外壳:Shell:C2680 T=0.30mm
Nickel Plating
3. 端子:Contact:Copper Alloy C7025

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls sn: 50u Ni: 50u Au: 1u

TOLERANCES .X ±0.30 .XX ±0.20 .XXX ±0.15 ANGLES ±2.00°		东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.		
APPROVED:		USB AF 双层180度17.0卷边弯脚		
CHECKED:		PART NO.: T10-2F170-180-D-J-X-W	PROJECTION:	
DRAWING:		REV.: A/0	SIZE: A4	UNIT: M M
		SCALE: 1:1	SHEET: 1/1	