
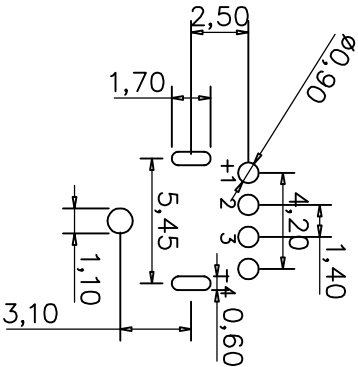

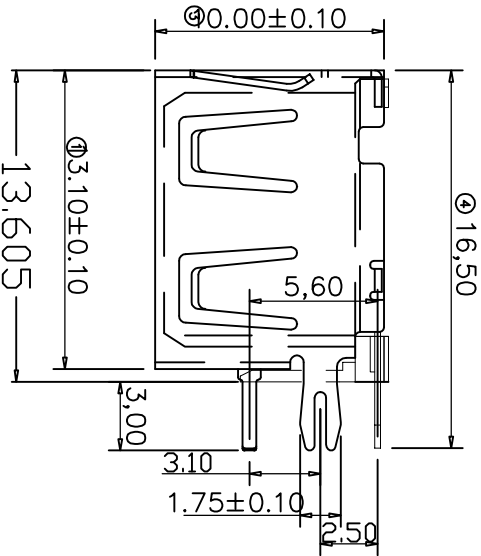

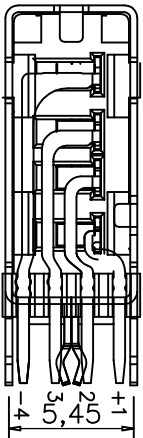


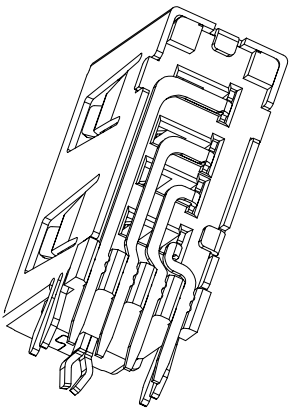

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料:Material:

- 塑胶:Housing:
Hing Temperature Ternmaplastics,

电镀:Finish:

- 端子:Contact:Copper Alloy C2680
 - 外壳:Shell: Copper Alloy C2680/SPCC
- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tolls
- 端子四周镀50U”(MIN)锡,镀金区域镀100—200U”镀金1U”
- 2.外壳:Shell:
铜壳四周镀80U”(MIN)锡
- Nickel Plating

东莞市田都电子有限公司

成品圖		東莞市田都電子有限公司									
MANUFACTURE DWG											
公差一覽表											
TOLERANCE UNLESS OTHERWISE											
X±0.15	X±5°	DATE	DATE	單位	MM	製圖	DRAWING	品名	DWGNO.		
XX±0.05	X±2°	CHECKED	CHECKED	比例	SCALE	設計	DESIGN	NAME	規格母座		
XXX±0.02	XX±1°	APPROVE	APPROVE	圖法	VIEW	圖法	VIEW	原本	VER	頁數	PG1