

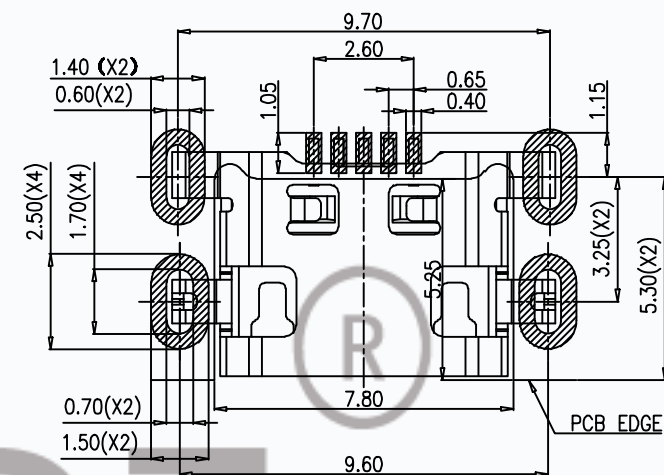
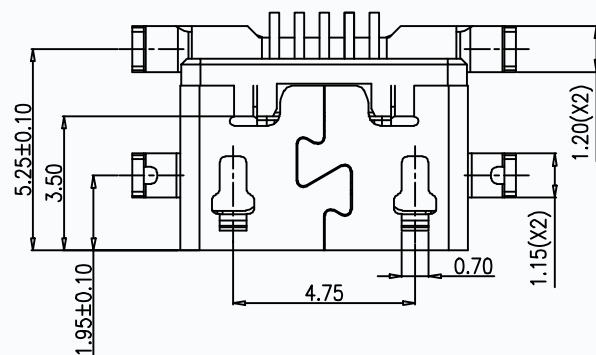

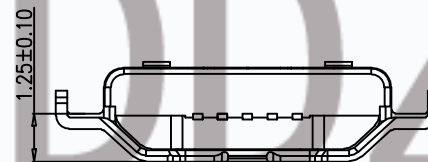


| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE       |
|------|---------|-------------|------|-------|------------|
| A1   | ---     | 新版本发行       | ERIC |       | 2013.05.23 |




RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

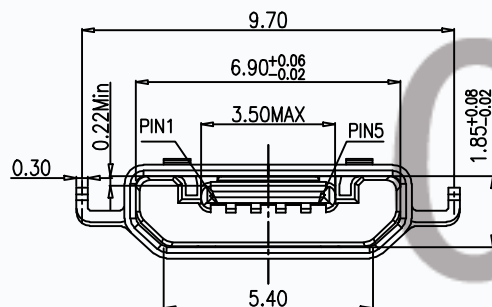

#### SPECIFICATION:

- 1 CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
- 2 VOLTAGE: 30 VAC
- 3 TEMPERATURE RANGE: -30 °C ~ 85 °C
- 4 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 5 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
- 6 INSULATION RESISTNACE: 100 MEGOHMS MIN

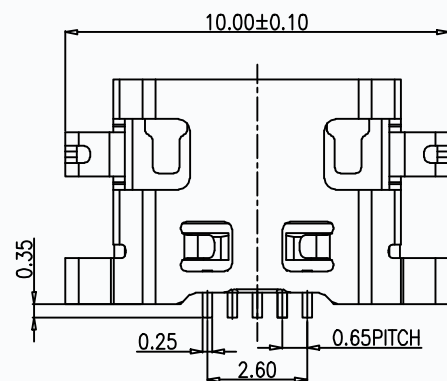

|             |             |                                        |                                                                                                                         |      |
|-------------|-------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------|
| 3           | CONTACT     | COPPER ALLOY T=0.15mm                  | Au/Ni Plated                                                                                                            | 1PCS |
| 2           | HOUSING     | High temperature plastic               | BLACK                                                                                                                   | 1SET |
| 1           | SHELL       | STAINLESS STEEL T=0.30mm               | TIN/Au/Ni Plated                                                                                                        | 1PCS |
| NO.         | DESCRIPTION | MATERIAL                               | REMARKS                                                                                                                 | QTY  |
| TOLERANCE   |             | NAME(INTENDED USE)<br>CUSTOMER DRAWING | CMTDZ 东莞市田都科技有限公司<br>Dongguan Tiandu Technology Co., Ltd.                                                               |      |
| X.X         | ±0.30       | X.' ± 2'                               | TITLE: MICRO USB 5P<br>反向沉板1.2四脚插板无翻边                                                                                   |      |
| .XX         | ±0.20       | .X' ± 1'                               |                                                                                                                         |      |
| .XXX        | ±0.10       | .XX' ±0.5'                             |                                                                                                                         |      |
| UNITS<br>mm |             | APPD:                                  | DRAWG NO. T10-05CB22                                                                                                    |      |
| MATERILA    |             | CHED:                                  |  SCALE 1:1<br>SHEET 1/1<br>REV. A1 |      |
| FINISH      |             | DRAW:                                  |                                                                                                                         |      |

| 料号             | 品名                 | 电镀规格   |
|----------------|--------------------|--------|
| T10-05CB22-270 | 反向沉板1.2<br>四脚插板无翻边 | 铁壳镀镍刷金 |
| T10-05CB22-121 | 反向沉板1.2<br>四脚插板无翻边 | 铁壳镀雾锡  |