


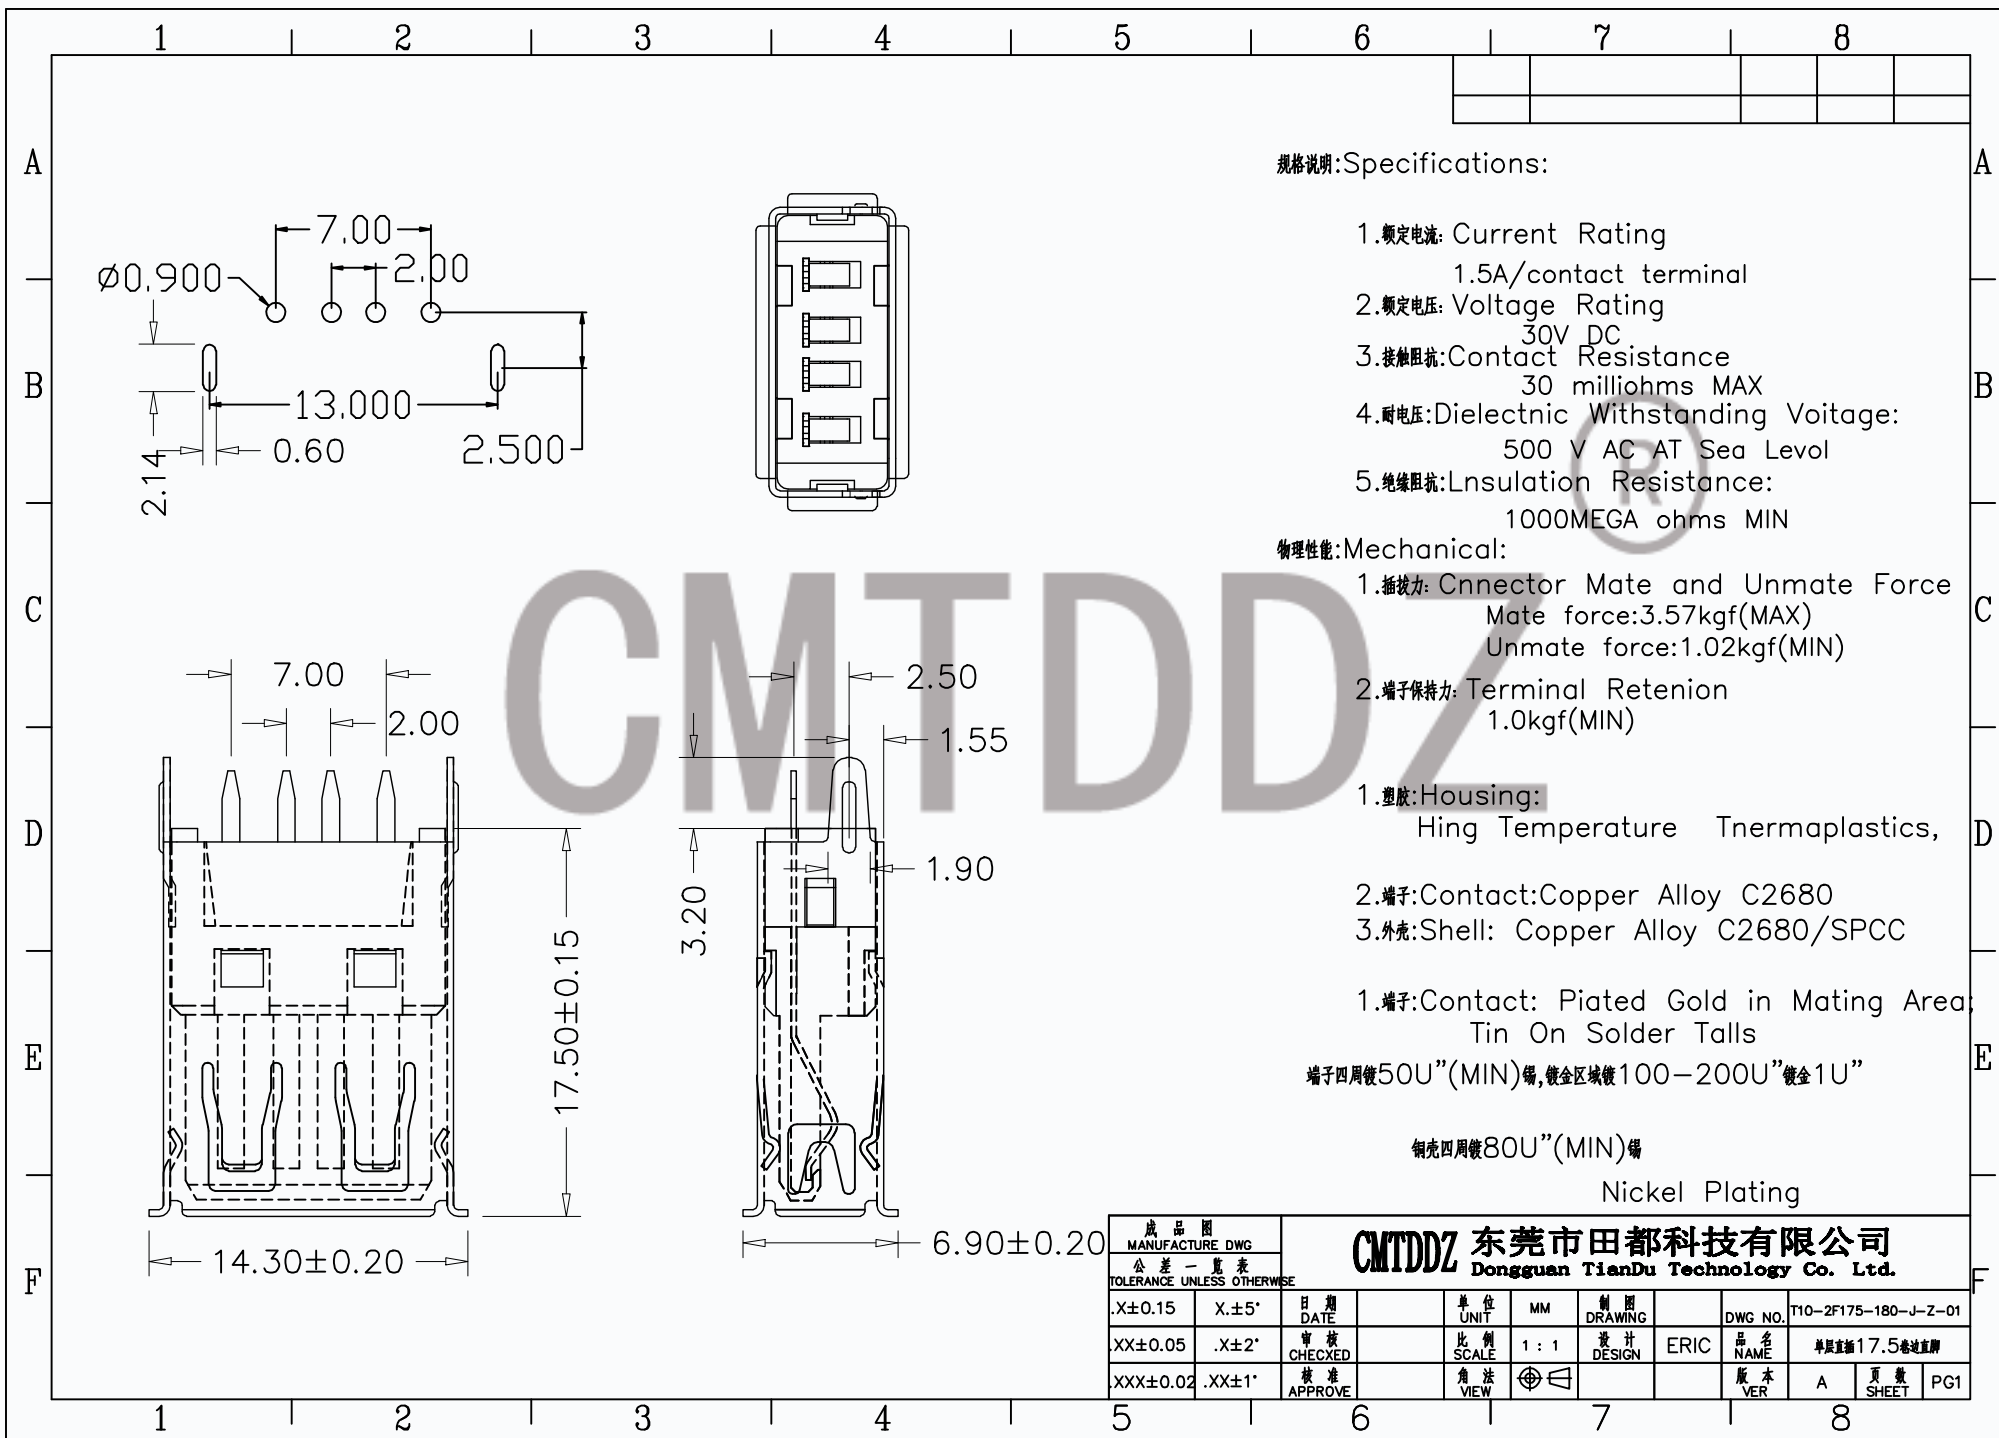

规格说明:Specifications:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗: Contact Resistance
30 milliohms MAX
- 4.耐电压: Dielectric Withstanding Voitage:
500 V AC AT Sea Level
- 5.绝缘阻抗: Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.0kgf(MIN)

- 1.塑胶: Housing:
Hing Temperature Tnermaplastics,
- 2.端子: Contact: Copper Alloy C2680
- 3.外壳: Shell: Copper Alloy C2680/SPCC

- 1.端子: Contact: Plated Gold in Mating Area
Tin On Solder Talls

端子四周镀50U”(MIN)锡,镀金区域镀100-200U”镀金1U”

铜壳四周镀80U”(MIN)锡

Nickel Plating

成品图 MANUFACTURE DWG		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.									
公差一览表 TOLERANCE UNLESS OTHERWISE		日期 DATE	单位 UNIT	MM	制图 DRAWING	DWG NO.	T10-2F175-180-J-Z-01				
.X±0.15	.X±5°	审核 CHECKED	比例 SCALE	1:1	设计 DESIGN	ERIC	品名 NAME	单层直插17.5毫米直脚			
XXX±0.02	.XX±1°	批准 APPROVE	角法 VIEW				版本 VER	A	页数 SHEET	PG1	