

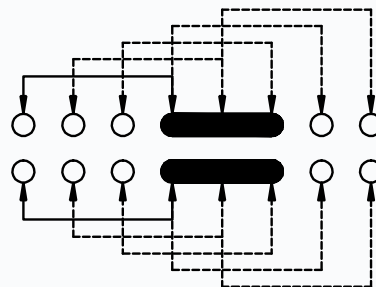


CAD FILE:


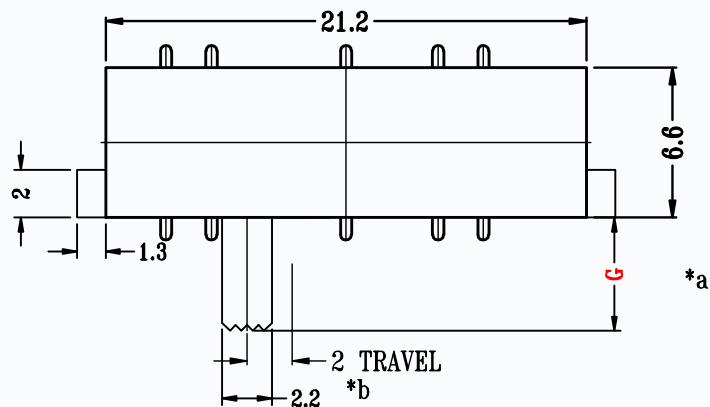


SCHEMATIC (SHORTING)

MODEL NO.	KNOB(G/VG)
T3-252004B-G	(2~15)mm

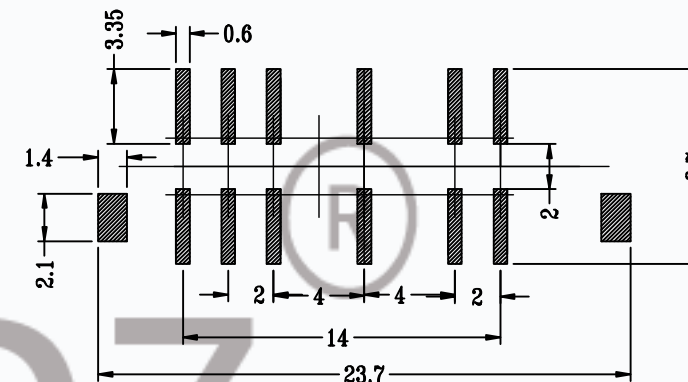

P.C.B. LAYOUT

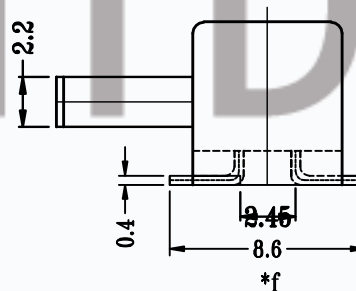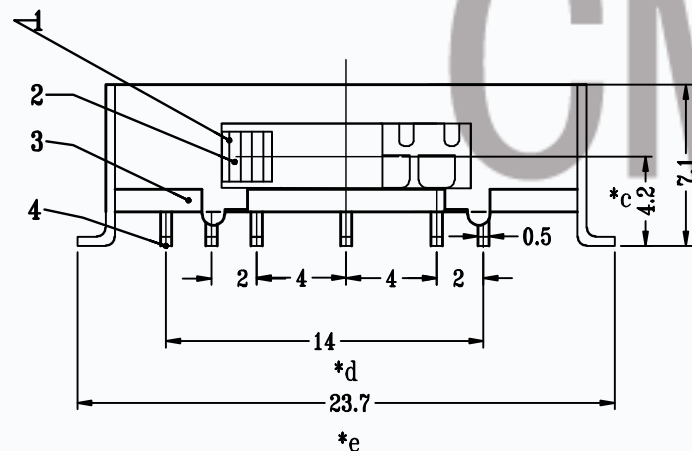

SPECIFICATIONS	
Rating	0.5A 50V DC
CIRCUIT	2P5T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD		
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED			
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm : ±0.1mm			
5	CONTACT CLIP	PBS C5210R-EH	2	Ag PLATED	OVER 1.5mm : ±0.2mm			
4	TERMINAL	BRASS STRIP	12	Ag PLATED			DESCRIPTIONS OF REVISION	APPD.
3	BASE	PHENOLIC RESIN	1	NATURAL		TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T3-252004B-00
2	KNOB	PA66	1	BLACK		MODEL: T3-252004B-G	SCALE: 3:1	DWN. ERIC 2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED		CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.	CHK'D MAIKO 2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH			APPD. Coco 2013-6-17	