

CAD FILE:






MODEL NO.



KNOB(G/VG)

T3-262004-G

(2~15)mm

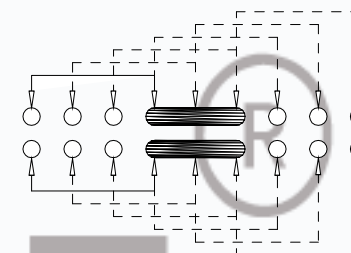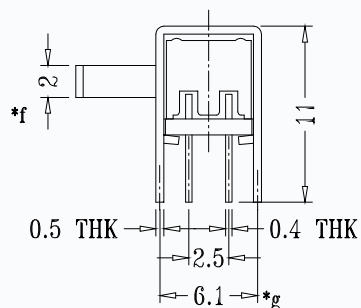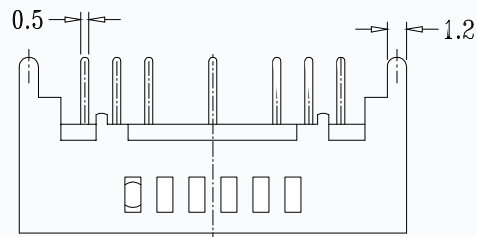

SCHEMATIC (SHORTING)

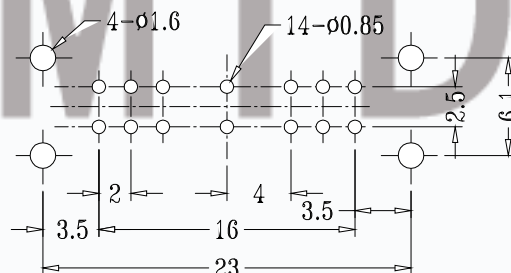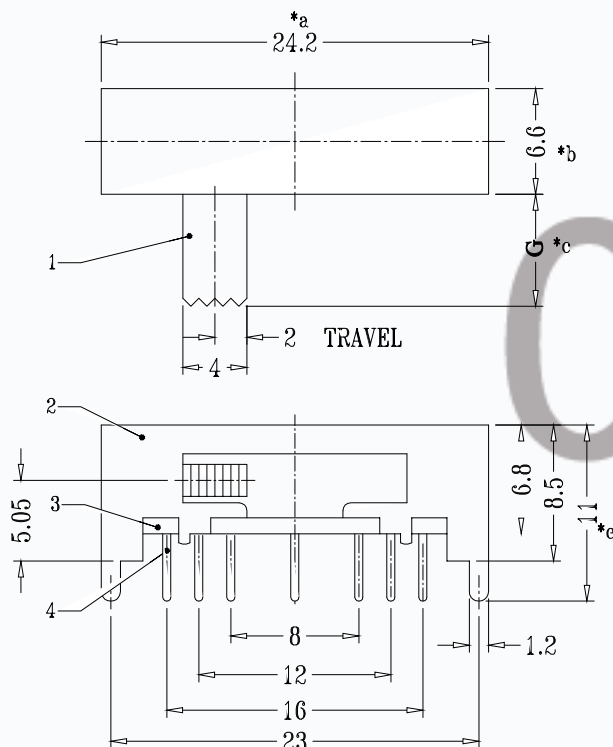P.C.B LAYOUT
BOTTOM VIEW

SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	2P3T
Timing	NON-SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD					
7	STEEL BALL	STEEL	2	NATURAL							
6	SPRING	STEEL WIRE	1	NATURAL							
5	CONTACT CLIP	PBS STRIP	2	Ag CLAD			DESCRIPTIONS OF REVISION				
							APPD.				
4	TERMINAL	BRASS STRIP	14	Ag PLATED	TITLE : HORIZONTAL SLIDE SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T3-262004-G		
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T3-262004-G		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	KNOB	PA66	1	BLACK	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							