



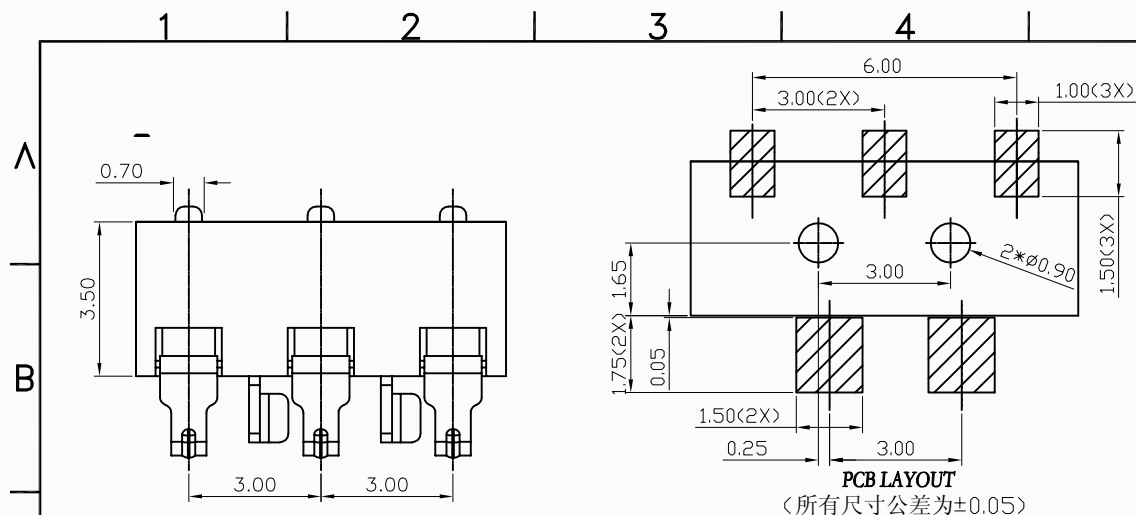


NOTES:

- 1) FINISH:
 - 1-1 CONTACT: 1u"MIN GOLD PLATING ON CONTACT AREA
1u"MIN GOLD PLATING ON SOLDERTAILS
50u"MIN.NICKEL UNDERPLATING OVER ALL
 - 1-2 NAIL: 50u"MIN NICKEL UNDERPLATING,
100~200u" TIN OVERALL
- 2) ELECTRICAL SPECIFICATIONS:
 - 2-1 VOLTAGE RATING: 250V POSITION
 - 2-2 CURRENT RATING: 2A
 - 2-3 INSULATION RESISTANCE: 500MEG.OHM MIN
 - 2-4 CONTACT RESISTANCE: 50 MILL.OHM MAX
 - 2-5 OPERATION TEMPERATURE: -20° TO +85°
 - 2-6 DURABILITY: 5000 CYCLES
 - 2-7 NORMAL FORCE: 90gf MIN AT THE WORKING
- 3) DIMENSIONS WITH MARK * "MUST BE MEASURE
BY QC AND IPQC

型号	DIM A	DIM E
5.7有柱	5.7	4.0
6.2有柱	6.2	4.5

3	NAIL	C2680R-EH	2PCS
2	TERMINAL	C5191R-EH	3PCS
1	HOUSING	LCP	1PCS
ITEM	NAME	MATERIAL	Q'TY

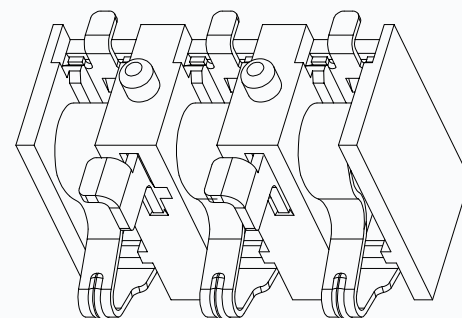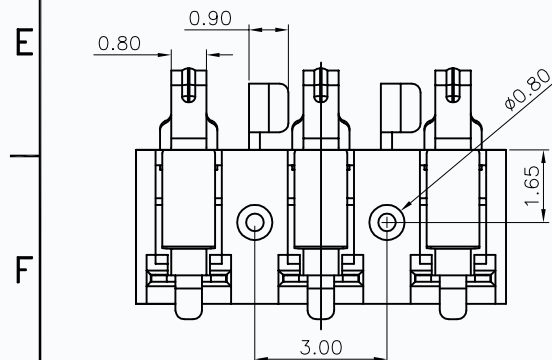

DIMENSION IN mm		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.20	X.*± 1.5"	APR.	TITLE: 3.0间距 5.7-6.2有柱		
.XX±0.15	.X.*± 1.0"	CHK.	DWG NO. T26-30T-3N-**-H-01		
.XXX±0.10	.XX*± 0.5"	DRA.	PROJ. 		ASSEMBLY DRAWING
			SIZE A4	SCALE 7:1	SHEET 1 / 1