
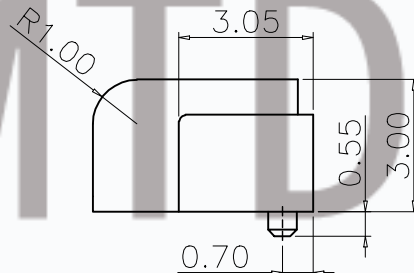
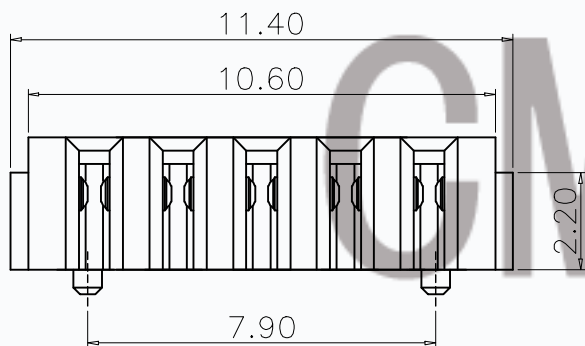
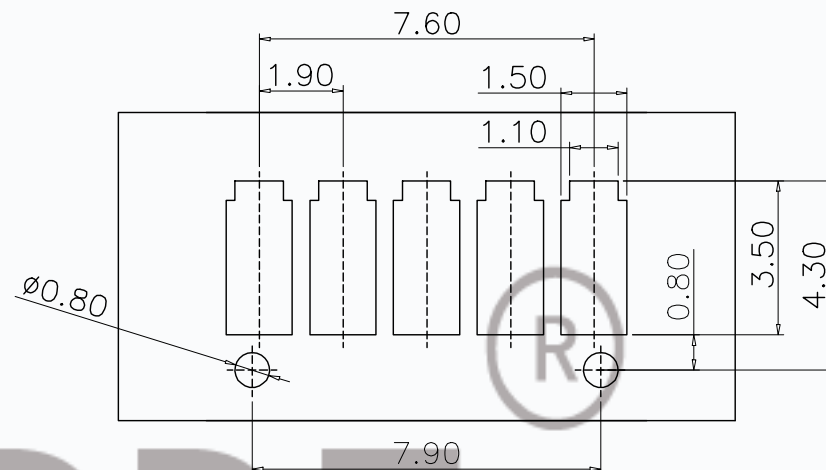



RoHS
Compliant

结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始图档		JACK	Yang	240629

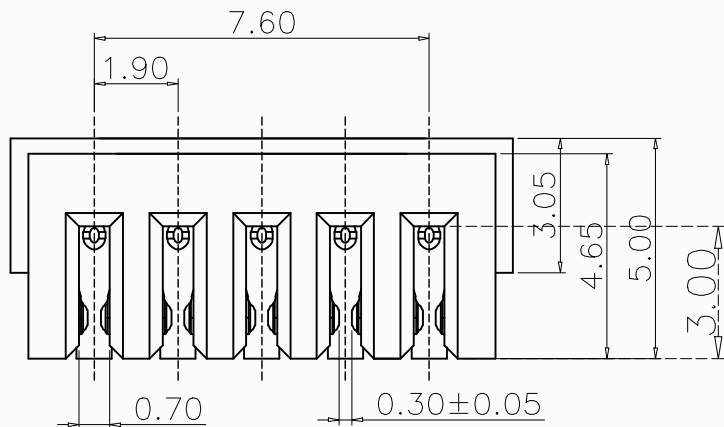

P. C. B LAYOUT
TOLERANCE: ±0.05

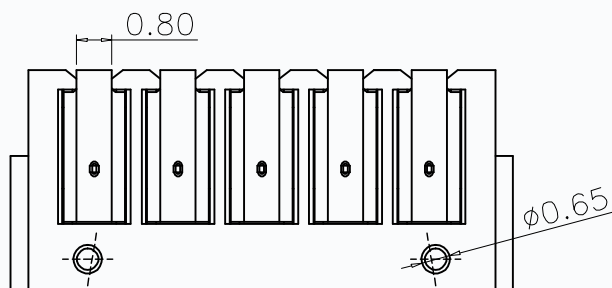

备注:

- 1.额定电流: 2.0A (单PIN)
- 2.额定电压: 30V(Max) AC/DC;
- 3.绝缘耐压: AC 1KV 1分钟相邻端子间无损坏
- 4.绝缘阻抗: 1000M Ω , 500V DC/1分钟相邻端子间无损坏
- 5.使用温度: -40℃~+85℃
- 6.主体材质: PA9T/耐温260° ±5°
- 7.五金材质: 磷铜镀金 (T=0.15mm)

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)				SCALE: 1:1	NUMBER:	CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co., Ltd.		
▽0		MM		INCH	NATURAL:	DEC:	TITLE: MINI 1.9PH 5pin 3.0H SMT 母座			
	.I	±0.25	.I	●	DRAWN BY	DATE				
	.XX	±0.15	.XX	●	CHECKED BY	DATE		THIRD ANGLE PROJECTION	REVISE ON CAP ONLY	
	.XXX	±0.05	.XXX	●						
	C0	ANGULAR ±1°				APPROVED BY	DATE	PART NO.	REV. NO.	1/1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										